

IDDUPS-6364120A

120 W DC Converter Module, with UPS



- **BAT-LI-2S2P3000**
Smart Battery, Lithium Ion,
2S2P, 3000mAH

• **IDDUPS-6364120A**


- **BAT-LI-2S2P3000**
Smart Battery, Lithium Ion,
2S2P, 3000mAH

Features

1. Load down protection
2. Over voltage protection
3. Short circuit protection
4. Over current protection
5. Smart battery charger for Lithium Ion
6. I/O interface: SMBus/I2C & RS-232
7. Support up to two battery packs
8. AT/ATX modes
9. Utility program: pull data out through RS-232 to system

Specifications

- Output: Voltage (max load)
» **IDDUPS-6364120A:**
5 V@10 A, 12 V@4 A, -12 V@0.3 A, 3.3 V@8 A & 5 VSB@2 A
- Max. total output:
IDDUPS-6364120A: 120 W
- Input: 6 VDC to 36 VDC
- Battery charge voltage: 12 V ~ 36 V
- Efficiency: up to 90%
- Dimensions: 60 mm x 160 mm
- Weight (NW):
IDDUPS-6364120A: 98 g
- Operating temperature: -20°C ~ 85°C (without smart battery)
Operating temperature: -10°C ~ 60°C (with smart battery)
- Storage temperature: -25°C ~ 90°C

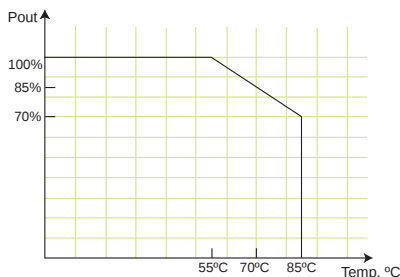

Applications



Battery backup system




Portable equipment



Power sensitive equipment

Dimensions (Unit: mm)

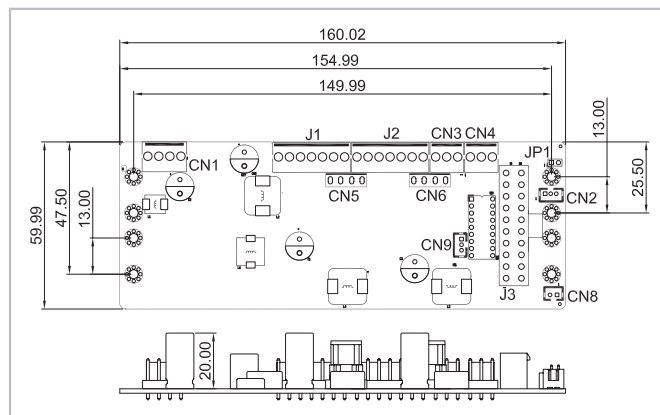

Packing Information

1 x IDDUPS-6364120A
1 x DB-9 pin connector cable (32100-157200-RS)
1 x CD utility software
1 x QIG

Ordering Information

Part No.	Description
IDDUPS-6364120A-R12	120 W ATX DC/DC 6-36 VDC input, 12 V, 5 V, 3.3 V, -12 V and 5 VSB power module with UPS
BAT-LI-2S2P3000-R10	Smart Battery, Lithium Ion, 2S2P, 3000 mAH
CB-5PSBC-RS	20 cm cable to SBC power input
CB-JST3PSW-RS	30 cm cable on/off switch
CB-JST3P001-RS	30 cm 5 VSB, PS_ON wire to SBC
CB-3PSATA-RS	10 cm cable for SATA power
CB-3PIDE-RS	10 cm cable for IDE HDD power
CB-P1LP4-RS	20 cm cable for FSP0601AD101C 60 W/ UP0451E12P 45 W/ UP0251E12PL 25 W AC-DC adapter
CB-MD4P4-RS	16 cm cable for 63000-FSP120AAB-RS 120 W AC-DC adapter
CB-NOLP4-RS	20 cm cable for terminal block DC input
32102-021500-200-RS	30 cm 20-pin ATX to 20-pin ATX cable

1
Industrial
Computing
Solutions

2
Video
Capture
Solutions

3
Embedded
Computing
Solutions

4
Automation
Control

5
ORing
Network
Communication

6
Power Supply/
Peripherals

7
Panel
Solutions
Introduction

■ High Energy Density, Light Weight and Compact DC/DC UPS & Power Module

Protect your precious equipment from damage. Reduce the risk of losing valuable data.


An uninterruptible power supply provides emergency backup power when the main power is lost.

Benefit:

- Provides power for a certain amount of time after a power failure has occurred.
- Provides stable power to equipment during line sags and spikes.
- Absorbs power surges & transients.
- Smooths out noisy power sources.

The utility software displays the following information:

- Current power source.
- Battery status.
- Charging status.
- Percentage remaining



Battery Capacity Status

■ Pin Assignments

Input Power Connector

CN1	Pin 1	Pin 2	Pin 3	Pin 4
	VIN	VIN	GND	GND


Output Power Connector

CN3 CN4	Pin 1	Pin 2	Pin 3
	+5 V	GND	+12 V

For IDDUPS-6364120A

J3	Standard 20-pin ATX
----	---------------------

■ Level 2 Smart Battery Charger & Power Modules

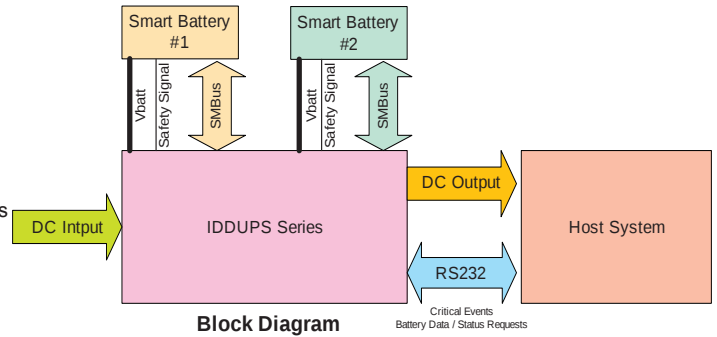

■ Battery Pack: Part # BAT-LI-2S2P3000



Battery Type	Lithium Ion			
Pout (W)	100	80	60	40
Time (min)	8	14	18	27
Dimensions	148 x 89 x 20 mm			
Capacity	3000 mAH			

ATX Mode Connector

CN2	Pin 1	Pin 2	Pin 3
	5 VSB	GND	PS_ON

Battery Connector

J1 J2	Pin1	Pin 2	Pin 3	Pin 4	Pin 5	Pin 6	Pin 7
	BAT+	BAT+	Clock	Data	Temp	GND	GND

■ Wire Harness Selection Guide

DC Input



Options 1.

PN: CB-P1LP4-RS

Cable for FSP0601AD101C 60 W/
UP0451E12P 45 W/UP0251E12PL
25 W AC-DC adapter



Options 2.

PN: CB-MD4P4-RS

Cable for 63000-FSP120AAB-RS
120 W AC-DC adapter



Options 3.

PN: CB-NOLP4-RS

Cable for terminal block

SBC Main Power



Options 1.

PN: 32102-021500-200-RS

20-pin ATX to 20-pin ATX cable

I/O Power



Options 1.

PN: CB-3PSATA-RS

Cable for SATA



Options 2.

PN: CB-3PIDE-RS

Cable for IDE HDD or any STD
4-pin I/O devices

Power On/Off



Options 1.

PN: CB-JST3PSW-RS

Cable with on/off switch



Options 2.

PN: CB-JST3P001-RS

Cable to SBC (5 VSB & PS_ON)