

UPort® 1250/1250I

2-port RS-232/422/485 USB-to-serial converters with optional 2 kV isolation



UPort® 1250

UPort® 1250I

- > Hi-Speed USB 2.0 for up to 480 Mbps USB transmission
- > 921.6 kbps maximum baudrate for super fast data transmission
- > 128-byte FIFO and on-chip H/W, S/W flow control
- > 15N high retention type B connector
- > Supports fixed-base COM Utility for setting the initial extended COM port number
- > Drivers provided for Windows, WinCE, and Linux
- > LEDs for easy monitoring
- > Locking power jack



Overview

The UPort® 1250/1250I USB-to-serial converters allow you to connect 2 RS-232/422/485 devices to your laptop or workstation through the

USB (Universal Serial Bus) port. These plug & play USB solutions are perfect for mobile, instrumentation, and point-of-sale applications.

Specifications

USB Interface

Compliance: USB 1.1/2.0 compliant

Connector: USB Type B

Speed: 480 Mbps (Hi-Speed USB) and 12 Mbps (Full-Speed USB)

Serial Interface

Number of Ports: 2

Serial Standards: RS-232/422/485

Connector: DB9 male

Electrical Isolation: 2 kV (UPort 1250I only)

Performance

Baudrate: 50 bps to 921.6 kbps (including 500 kbps)

Serial Communication Parameters

Data Bits: 5, 6, 7, 8

Stop Bits: 1, 1.5, 2

Parity: None, Even, Odd, Space, Mark

Flow Control: RTS/CTS, XON/XOFF

FIFO: 128 bytes

Serial Signals

RS-232: Tx/D, Rx/D, RTS, CTS, DTR, DSR, DCD, GND

RS-422: Tx/D+(B), Tx/D-(A), Rx/D+(B), Rx/D-(A), GND

RS-485-4w: Tx/D+(B), Tx/D-(A), Rx/D+(B), Rx/D-(A), GND

RS-485-2w: Data+(B), Data-(A), GND

RS-485 Data Direction: ADDC® (Automatic Data Direction Control)

Operating Systems

Windows Real COM Drivers: Windows 2000, Windows XP/2003/Vista/2008/7/8/8.1/10 (x86/x64), Windows 2012 (x64), Windows Embedded CE 5.0/6.0

Linux Real TTY Drivers: Linux 2.4.x, 2.6.x, 3.x

Android Driver: Android 3.1.x and later

Note: Please refer to Moxa's website for the latest driver support information.

Physical Characteristics

Housing: SECC sheet metal (1 mm)

Weight:

Product only: 180 g (0.40 lb)

Packaged:

UPort 1250: 370 g (0.82 lb)

UPort 1250I: 680 g (1.5 lb)

Dimensions: 77 x 26 x 111 mm (3.03 x 1.02 x 4.37 in)

Environmental Limits

Operating Temperature: 0 to 55°C (32 to 131°F)

Storage Temperature: -20 to 75°C (-4 to 167°F)

Ambient Relative Humidity: 5 to 95% (non-condensing)

Standards and Certifications

Safety: UL 60950-1

EMC: EN 55022/24

EMI: CISPR 22, FCC Part 15B Class A

EMS:

IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV

IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m

IEC 61000-4-4 EFT: Power: 1 kV

IEC 61000-4-5 Surge: Power: 1 kV

IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m

IEC 61000-4-8 PFMF

Green Product: RoHS, CRoHS, WEEE

Power Requirements

Input Voltage:

UPort 1250: 5 VDC

UPort 1250I: 12 to 48 VDC

Input Current:

UPort 1250: 360 mA @ 5 VDC

UPort 1250I: 200 mA @ 12 VDC

MTBF (mean time between failures)

Time: 563,179 hrs
Telcordia (Bellcore), GB


Warranty

Warranty Period: 5 years
Details: See www.moxa.com/warranty


Dimensions

Unit: mm (inch)

UPort® 1250

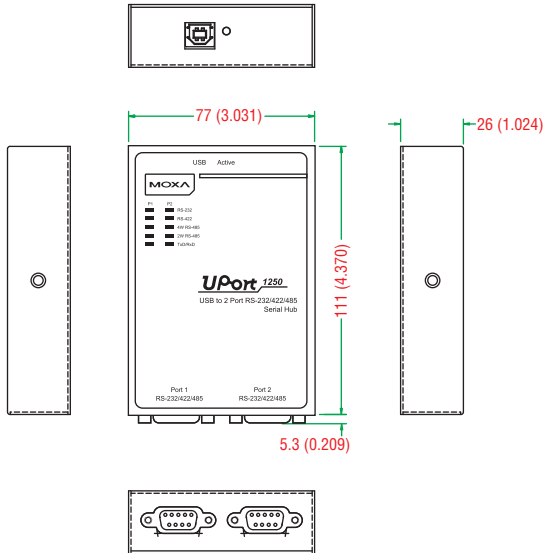

UPort® 1250I

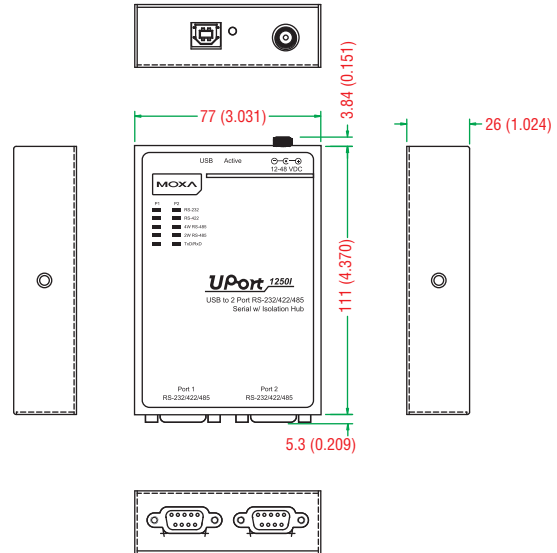

Ordering Information

Available Models

UPort 1250: 2-port RS-232/422/485 USB-to-serial converter

UPort 1250I: 2-port RS-232/422/485 USB-to-serial converter with 2 kV electrical isolation, adaptor included

Optional Accessories (can be purchased separately)

DK35A: 35-mm DIN-rail mounting clips; 2 DIN-rail plates with 4 screws

Mini DB9F-to-TB: DB9 female to terminal block connector

CBL-USBA/B-100: USB Type A to USB Type B cable, 100 cm

CBL-F9M9-150: DB9 female to DB9 male serial cable, 150 cm

CBL-F9M9-20: DB9 female to DB9 males serial cable, 20 cm

CBL-RJ45SF9-150: RJ45 to DB9 female shielded serial cable, 150 cm

ADP-RJ458P-DB9: DB9 female to RJ45 connector

A-ADP-RJ458P-DB9F-ABC01: DB9 female to RJ45 connector

DK-UP1200: DIN-rail/wall- mounting kit that includes 2 wall-mounting plates with 6 screws (WK-35-02), and 2 DIN-rail plates with 4 screws (DK35A)

Note: One power cord suitable for your region is included in the product package. Additional power adapters and power cords can be purchased separately. Please refer to the Power Accessory Selection Guide for details.

Package Checklist

- 1 UPort 1250 or 1250I USB-to-serial converter
- 1 serial adapter: mini DB9F-to-TB
- USB cable: CBL-USBA/B-100
- UPort 1250I only:
 - > 100 to 240 VAC power adapter suitable for your region
 - > 1 power cord suitable for your region
- Documentation and software CD
- Quick installation guide (printed)
- Warranty card

DK-UP1200



Available Accessory