


CME-KBMS1UT-19 1U RACKMOUNT SLIDE KEYBOARD & MOUSE COMBO



DIMENSIONS

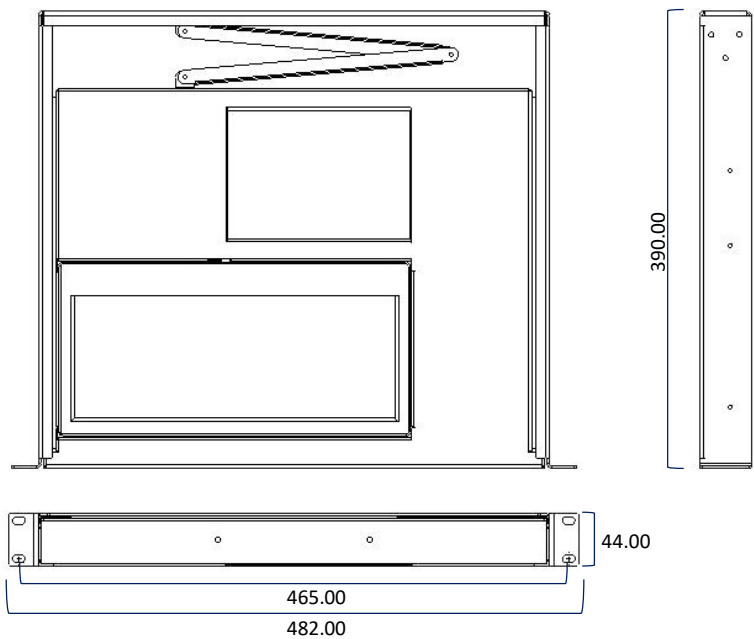

SPECIFICATIONS

Keyboard	USA English Layout	
Weight	± 3.5kg	
Casing Color	Black	
Dimensions	482 x 390 x 44 mm	
Material	Chassis composed of powder coated galvanised steel.	
Environmental	Operating Temperature	-20º C to + 60º C
	Storage Temperature	- 40º C to + 80º C
	Saline Mist	96 hours, IEC 60512-6
	Damp Heat Test	+ 40º C: 21 days, IEC 60512-6
	Dry Heat Test	+ 85º C: 10 days, IEC 60512-6
Mechanical Data	Actuation Force	50 ±10g
	Key Travel	2.2mm ±0.5mm
	Lifetime (cycles)	Min 5, 000, 000 actuations
	Sealing Protection	IP65/NEMA4X from the front
	Vibration Resistance	5 Hz -200 Hz, IEC 60512-4
Compatible Operation System	Shock Resistance	3 axis 150 m/s ² -11 ms, IEC 60512-4
	USB	Win 98SE, 98ME, 2000, XP, Mac OS9 / OSX,Win7/8.1/10
	PS2 (Optional)	Win NT4, 98SE, 98ME, 2000, XP
Electrical Data	Power Supply Voltage	DC 5 V ± 5%
	Current Rating	<=100 mA
	Interface	USB (PS2 Optional)
	EMC Emission	EN55022(B)
Mouse	USB Optical Mouse	Included

*All product specifications and product images are subject to change without notice.