



IDD-9364120A

120 W DC/DC Converter Module

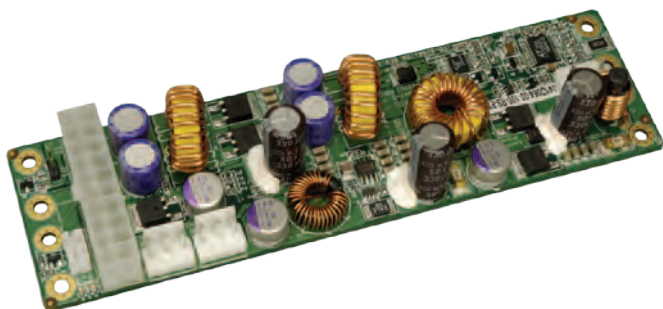

Specifications


- Output (max.): 12 V@4 A, 5 V@10 A, 3.3 V@8 A, -12 V@0.3 A & 5 VSB@2 A
Max. total output: 120 W
- Input: 9 VDC to 36 VDC
- Performance characteristics
Noise & ripple: <240 mV
Line regulation: <50 mV
Load regulation: <100 mV
Efficiency: Up to 90%
- Dimensions: 45 mm x 160 mm
- Weight: NW: 104 g
- Operating temperature: -20°C ~ 70°C
- Storage temperature: -25°C ~ 75°C



Features

- Wide input range: 9-36 VDC
- AT or ATX mode on/off
- Output voltage protection
- Up to 90% efficiency
- RoHS compliant
- Compact size

Dimensions (Unit: mm)

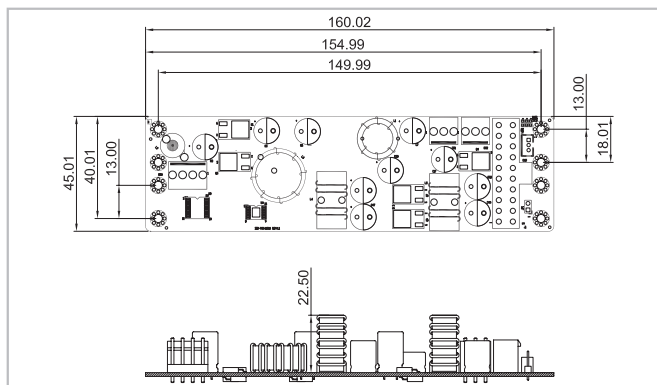

Packing Information

1 x IDD-9364120A

1 x QIG

Ordering Information

Part No.	Description
IDD-9364120A-R11	120 W DC/DC 9~36 V input, 12 V, 5 V, 3.3 V, -12 V & 5 VSB output
CB-JST3PSW-RS	30 cm cable on/off switch
CB-JST3P001-RS	30 cm 5 VSB, PS_ON wire to SBC
CB-3PSATA-RS	10 cm cable for SATA power
CB-3PIDE-RS	10 cm cable for IDE HDD power
CB-P1LP4-RS	20 cm cable for FSP0601AD101C 60 W/ UP0451E12P 45 W/ UP0251E12PL 25 W AC-DC adapter
CB-MD4P4-RS	16 cm cable for 63000-FSP120AAB-RS 120 W AC-DC adapter
CB-NOLP4-RS	20 cm cable for terminal block DC input
32102-021500-200-RS	30 cm 20-pin ATX to 20-pin ATX cable

Pin Assignments

Input Power Connector

CN4	Pin 1	Pin 2	Pin 3	Pin 4
	VIN	VIN	GND	GND

Output Power Connector

CN1 CN2	Pin 1	Pin 2	Pin 3
	+5 V	GND	+12 V
J1	Standard 2-pins ATX		

ATX Mode Connector

CN3	Pin 1	Pin 2	Pin 3
	5 VSB	GND	PS_ON

Wire Harness Selection Guide

DC Input (CN4)



Options 1.

PN: CB-P1LP4-RS

Cable for FSP0601AD101C 60 W/ UP0451E12P 45 W/ UP0251E12PL 25 W AC-DC adapter



Options 2.

PN: CB-MD4P4-RS

Cable for 63000-FSP120AAB-RS 120 W AC-DC adapter



Options 3.

PN: CB-NOLP4-RS

Cable for terminal block

SBC Main Power (J1)



Options 1.

PN: 32102-021500-200-RS

20-pin ATX to 20-pin ATX cable

I/O Power (CN1 & CN2)



Options 1.

PN: CB-3PSATA-RS

Cable for SATA



Options 2.

PN: CB-3PIDE-RS

Cable for IDE HDD or any STD 4-pin I/O devices

Power On/Off (CN3)



Options 1.

PN: CB-JST3PSW-RS

Cable with on/off switch



Options 2.

PN: CB-JST3P001-RS

Cable to SBC (5 VSB & PS_ON)

1

Industrial
Computing
Solutions

2

Video
Capture
Solutions

3

Embedded
Computing
Solutions

4

Automation
Control

5

ORing
Network
Communication

6

Power Supply/
Peripherals

7

Panel
Solutions
Introduction