



SPECIFICATIONS

* FEATURES:

- * High Brightness.
- * External OSD key board.
- * Fast response time.
- * Low electromagnetic wave and power saver.
- * RoHS compliance.

New Model name		MT10T-X500
OLD Model name		MT35101AX-01
New ModelSelectionGuide		MTXXX-@50X(@=0=PConly,@=1=CGA-EGA-PC)
Old ModelSelectionGuide		MT35xxxAX(A0=PConly,A1=CGA-EGA-PC)
Touch System	3MTouch	
LCD Panel	Screen Size	10.4
	Pixel Pitch(mm)	0.264*0.264
	Backlight	CCFL*1
	Cell Type	TN
	Response	35ms
	Aspect Ratio	4:3
Viewing Angle	Horizontal	140°
	Vertical	120°
Video	Input Mode	SVGA
	Horizontal	15~48KHz
	Vertical	50~75Hz
Display	Resolution	800*600
	Contrast Ratio	500:1Typ
	Brightness	230cd/m2
	Horizontal Size(mm)	211.2
	Vertical Size(mm)	158.4
	Colors	262K
	Bandwidth	30MHz
Power	Consumption	20Wmax
	Management	VESA-DPMS
		20Wmax
		PowerDown
		Mode< /=3Watts
	Input	AC/DC Adaptor(Input100-240VAC,Output12VDC/4A)
Operations	Function Key	5Key
	OSD Adjustment	Constrast,Brightness,Phase,Clock,H-position,V-position,V-size....Exit
Input Signal		0.7Vpp Analog75 ohm
Sync		TTL Level Separate,Composite
Windows Compatibility		WindowsXP/2000
PC Interface		Analog Interface
Signal Cable		Standard VGA cable w/15-pin D-sub
EMI/Safety		
Operating Temperature		0°C~40°C
Humidity		10~85%
Outer Dimension(L*W*H)mm		248*177*30
Packing Dimension(L*W*H)mm		555*350*372

OUTER DIMENSION

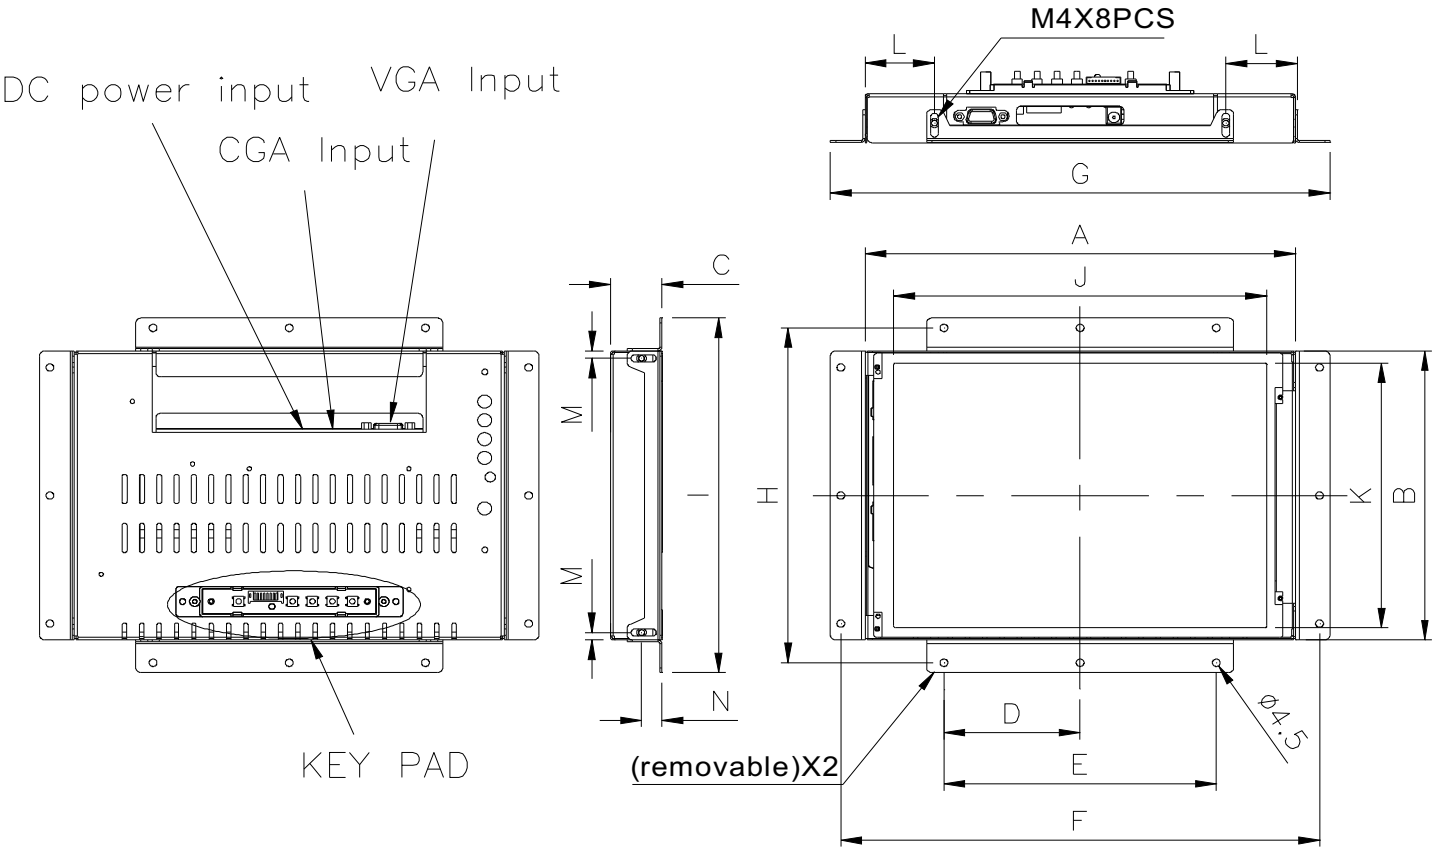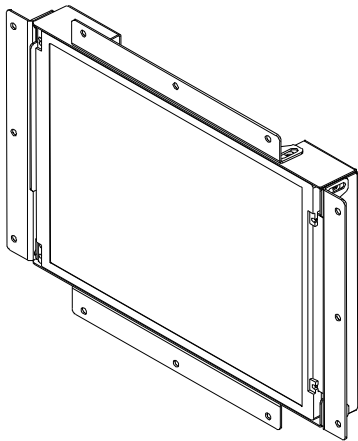

MODEL	A	B	C	D	E	F	G	H	I	J	K	L	M	N
MT35101AX-01	248	177	30	78.5	157	276	288	205	217	215	162	40	4.5	11.5