

SPECIFICATIONS


* FEATURES:

- * High Brightness.
- * External OSD key board.
- * Fast response time.
- * Low electromagnetic wave and power saver.
- * RoHS compliance.

New Model name		MT15T3R(U)-15053-A
New Model Selection Guide		MT15XXX-@50XX-X (@=0=PC only, @=1=CGA-EGA-PC)
Touch System	3MTouch	RS232/USB
LCD Panel	Screen Size	15"
	Pixel Pitch(mm)	0.297*0.297
	Backlight	TFT
	Cell Type	
	Response	23ms
	Aspect Ratio	4:3
Viewing Angle	Horizontal	176 °
	Vertical	176 °
Video	Input Mode	XGA
	Horizontal	15~60KHz
	Vertical	50~75Hz
Display	Resolution	1024*768
	Contrast Ratio	2000:1Typ
	Brightness	200cd/m2
	Horizontal Size(mm)	304.128
	Vertical Size(mm)	228.096
	Colors	16.2M
	Bandwidth	65MHz
Power	Consumption	20Wmax
	Management	VESA-DPMS
		20Wmax
		PowerDown
		Mode<=3Watts
Operations	Input	AC/DC Adaptor(Input100-240VAC,Output12VDC/4A)
	Function Key	5Key
	OSD Adjustment	Contrast,Brightness,Phase,Clock,H-position,V-position,V-size....Exit
Input Signal		0.7Vpp Analog75 ohm
Sync		TTL Level Separate,Composite
Windows Compatibility		WindowsXP/2000/7
PC Interface		Analog Interface
Signal Cable		Standard VGA cable w/15-pin D-sub
EMI/Safety		
Operating Temperature		0°C~40°C
Humidity		20~80%
Outer Dimension(L*W*H)mm		331x51.7x255.5

OUTER DIMENSION

DCC4R029

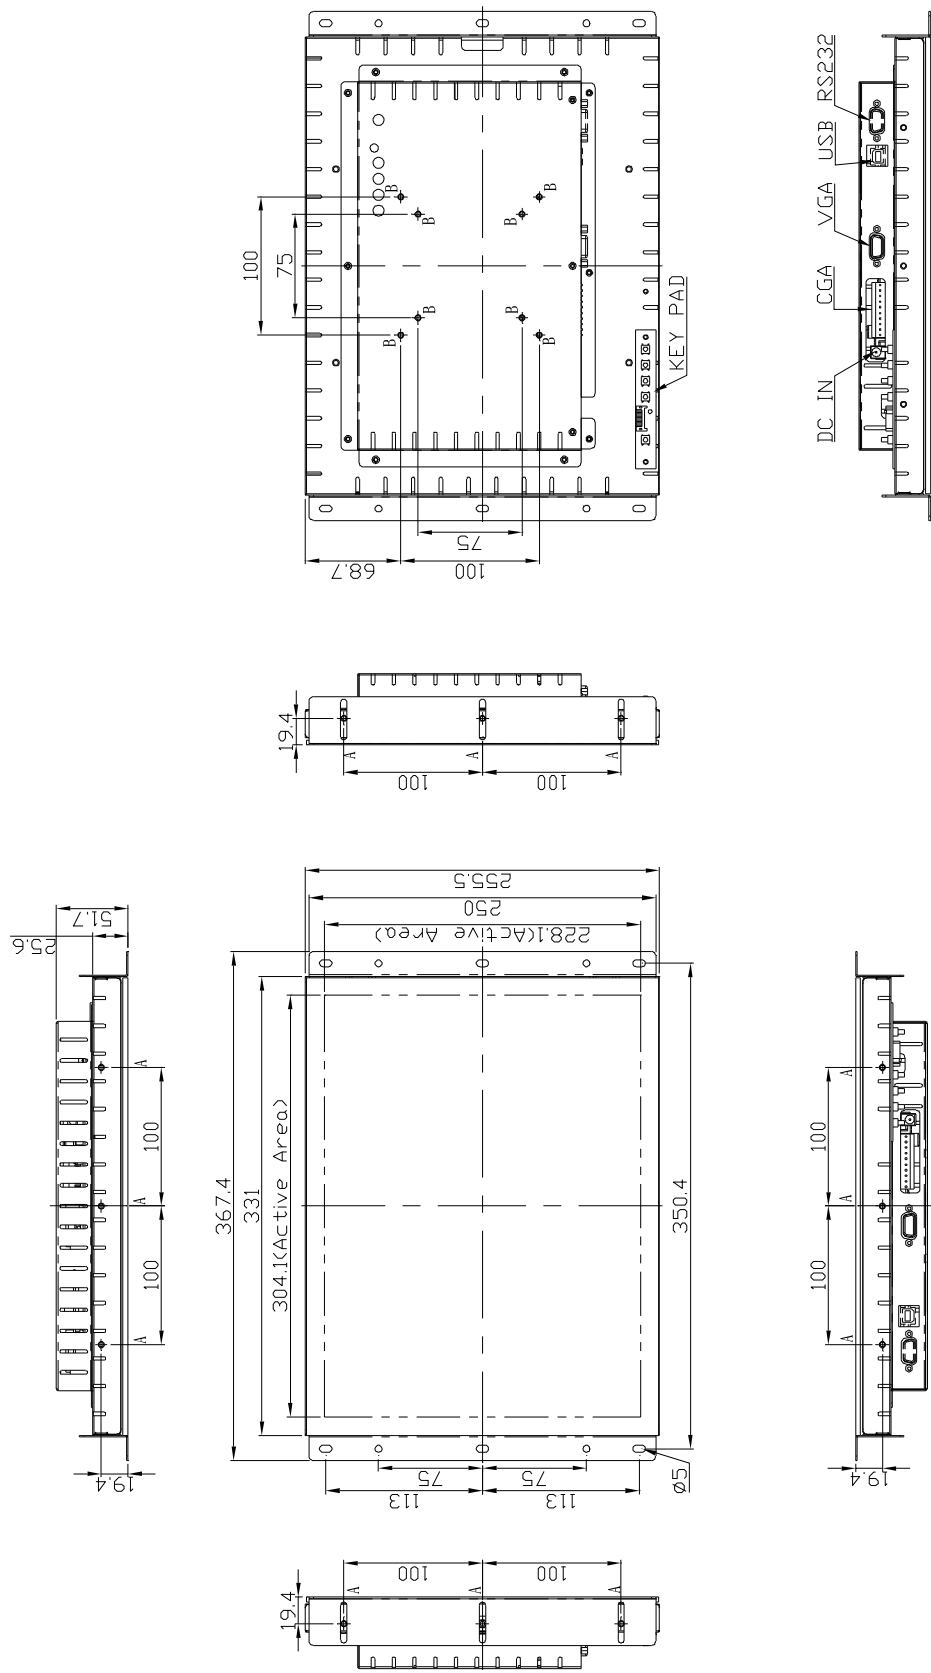

MARK	REV.	DESCRIPTION	AUTHOR	DATE	Checked	Approval	MATERIAL	FINISH	DATE	SCALE
									2019.03.14	1:5
Note:					懷藝電子股份有限公司					
A=User Hole					DRAW NO. D-J-MT15T3R(U)-15053-A-01A REV.					
M4, PITCH=0.7/MACHINE, MAX. DEPTH=6.0					Model MT15T3R(U)-15053-A					
MAX. TORQUE=14.3~16.3kgf-cm					UNIT					
B=Vesa Hole					m/m					
M4, PITCH=0.7/MACHINE, MAX. DEPTH=6.0										
MAX. TORQUE=14.3~16.3kgf-cm										