

SPECIFICATIONS

* FEATURES:


- * High Brightness.
- * External OSD key board.
- * Fast response time.
- * Low electromagnetic wave and power saver.
- * RoHS compliance.

Model		MT23W3U-86063-3
ModelSelectionGuide		MTXXXXX-@6063-3(@=0=VGAonly,@=8=VGA+DVI+HDCP)
Touch System	3MTouch	USB
	ELO-Touch	
LCD Panel	Screen Size	23.0
	Pixel Pitch(mm)	0.2652*0.2652
	Backlight	LED
	Cell Type	PVA
	Response	12ms
	Aspect Ratio	16:9
Viewing Angle	Horizontal	178 °
	Vertical	178 °
Video	Input Mode	Full HD
	Horizontal	31~67KHz
	Vertical	59~60Hz
Display	Resolution	1920*1080
	Contrast Ratio	1000:1Typ
	Brightness	300cd/m2 Typ.
	Horizontal Size	509.184
	Vertical Size	286.416
	Colors	16.7M
	Bandwidth	67.3 MHz Typ
Power	Consumption	25W Typ.+/-20 %
	Management	VESA-DPMS
		25 W Typ.+/-20%
		PowerDown
		Mode<=5Watts
Operations	Input	AC/DC Adapter(Input100-240VAC,Output 12VDC)
	Function Key	5Key
	OSD Adjustment	Constrast,Brightness,Phase,Clock,H-position,V-position,...Exit
Input Signal		0.7Vpp Analog75 ohm
Sync		TTL Level Separate,Composite
Windows Compatibility		Windows98/2000/XP/7
PC Interface		Analog Interface
Signal Cable		Standard VGA cable w/15-pin D-sub
EMI/Safety		
Operating Temperature		0°C~50°C
Humidity		10~85%
Outer Dimention		556.4x314.7x55

Support PC Timing

Item	Resolution	H Freq.(kHz)	V Freq.(Hz)	Note
1	640x480@60	31.469	59.940	VGA
2	800x600@56	35.156	56.250	SVGA
3	800x600@60	37.879	60.317	SVGA
4	1024x768@60	48.363	60.004	XGA
5	1280x768@60	47.600	60.030	WXGA
6	1360x768@60	47.539	59.573	LCD
7	1366x768@60	47.700	60.000	LCD
8	1920X1080@60	67.158	59.96	Full HD

OUTER DIMENTION

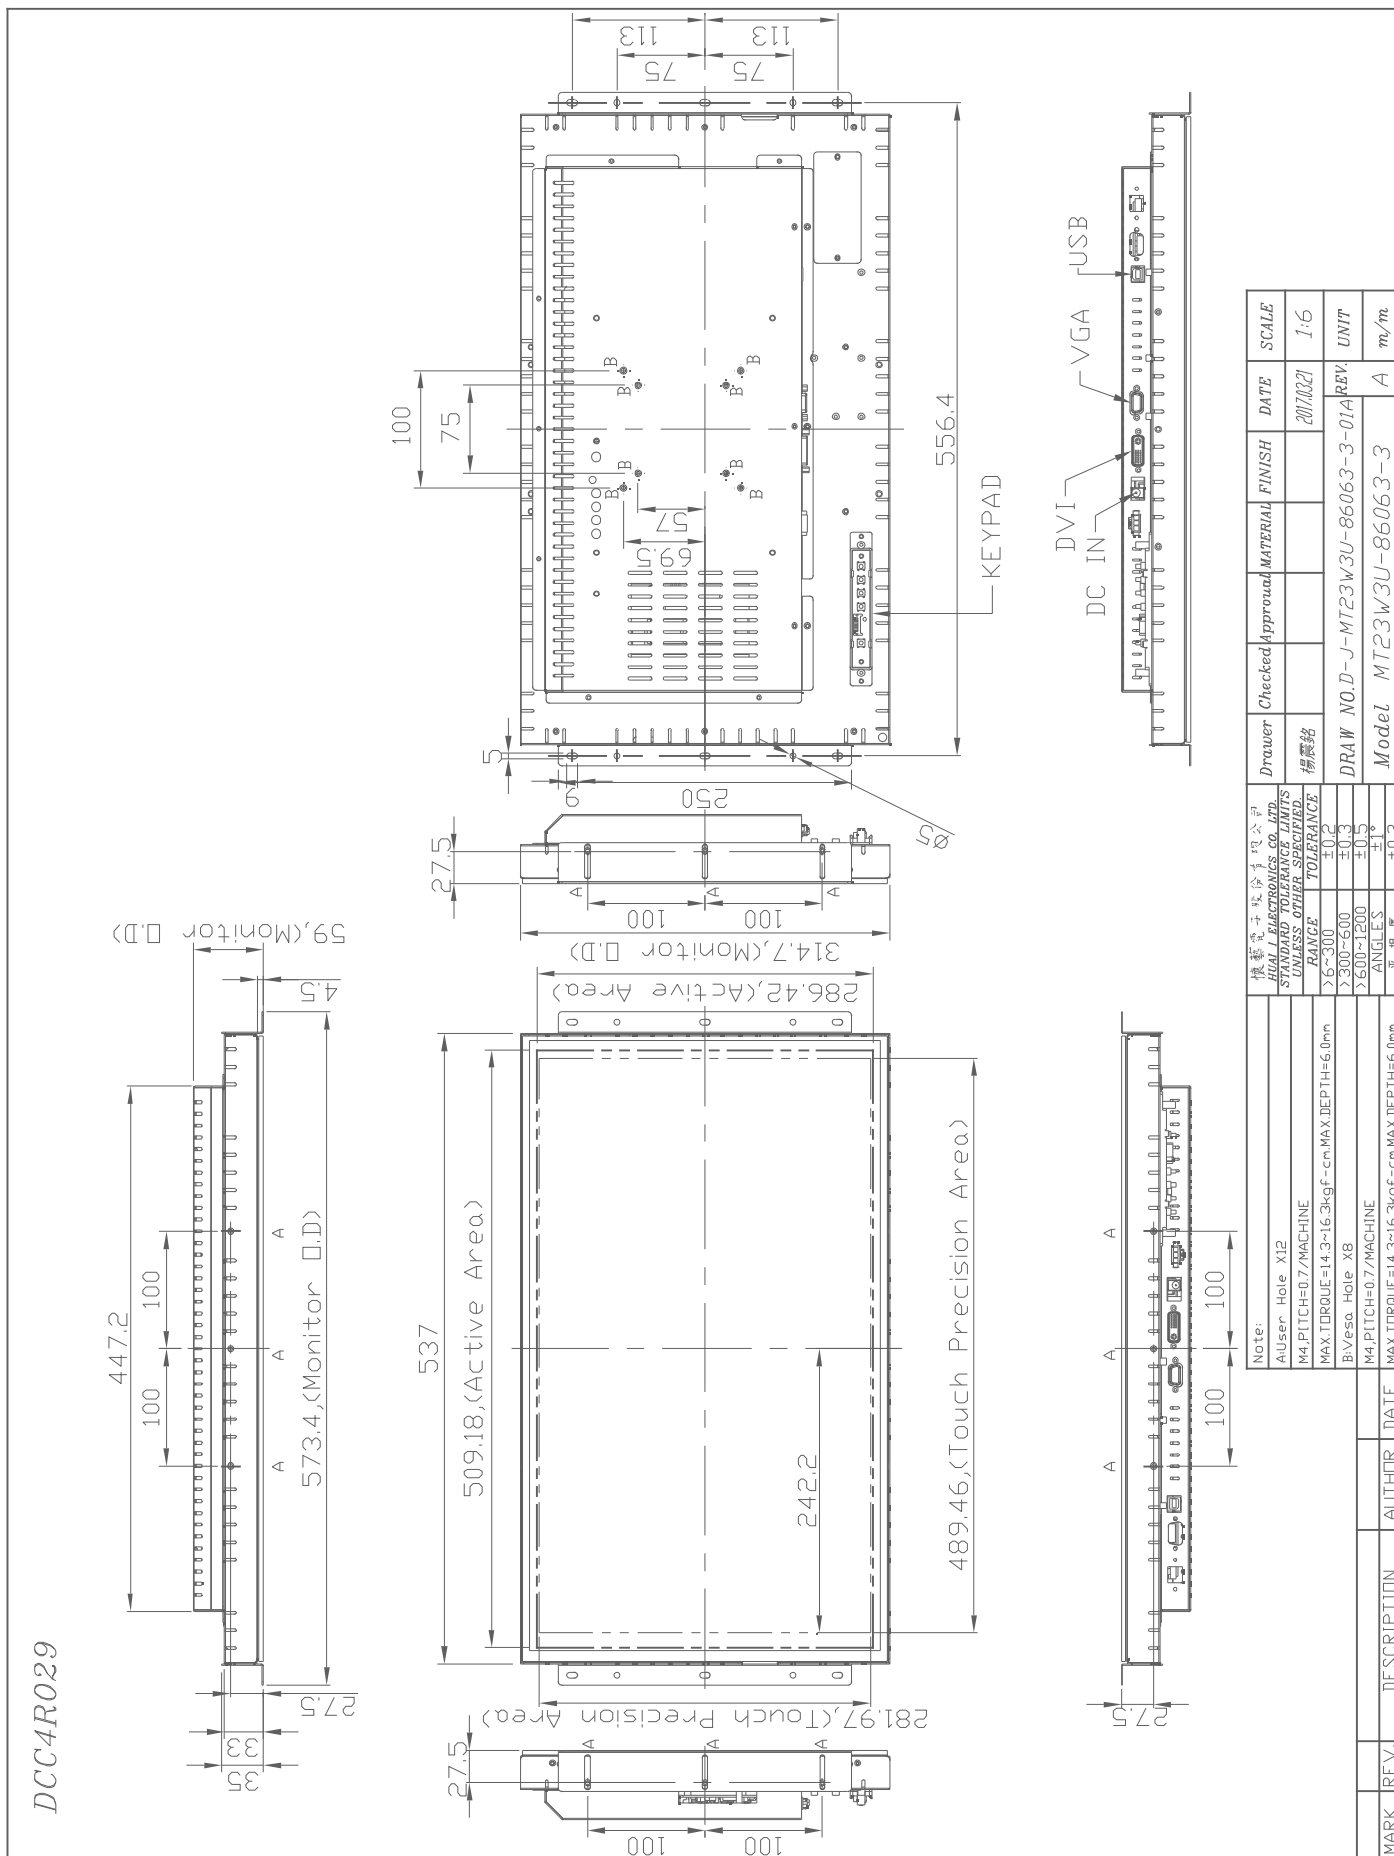



維亞