

UPort® 1600-8 Series

8-port RS-232 and RS-232/422/485 USB-to-serial converters



- > Hi-Speed USB 2.0 for up to 480 Mbps USB transmission
- > 921.6 kbps maximum baudrate for super fast data transmission
- > 15N high retention USB Type B connector
- > 128-byte FIFO and on-chip H/W, S/W flow control
- > COM port assignments maintained across different PCs
- > Supports fixed-base COM Utility for setting the initial extended COM port number
- > Mini DB9 female to terminal block adapter for easy wiring
- > Drivers provided for Windows, WinCE, and Linux
- > Locking power cord



Overview

The UPort® 1600-8 USB-to-serial converters allow you to connect 8 RS-232 or RS-232/422/485 devices to your laptop or workstation through the USB (Universal Serial Bus) port. The UPort® 1600-8


converters are compatible with new and legacy serial devices, and they are perfect for instrumentation and manufacturing applications.

Typical Application Topology

Medical scientists and pharmaceutical researchers rely on sophisticated laboratory equipment to discover new treatments for patients. Most research is carried out in teams given the complex and collaborative nature of medical science. Scientists often transfer images and data from microscopes and other equipment to each other's laptops or desktop computers. Connecting all of these pieces of equipment usually requires multiple serial ports, one for each peripheral device. Since computers are only equipped with a limited number of serial ports, expanding a USB connection into multiple serial ports can provide researchers with the connectivity they need to make their next scientific breakthrough. Moxa's solution is the UPort®

1600-8, which is an RS-232 USB-to-serial converter that can be used to connect multiple serial interface microscopes and other equipment to a computer's USB port. The UPort® 1600-8 provides the following benefits:

- Up to 8 ports for easy USB-to-serial expansion
- True USB 2.0 high-speed transmission for large data transmission
- 128-byte FIFO and on-chip hardware and software flow control to ensure stable data transmission
- Easy troubleshooting with LED indicators for each serial port
- Compatibility with both laptop and desktop PCs

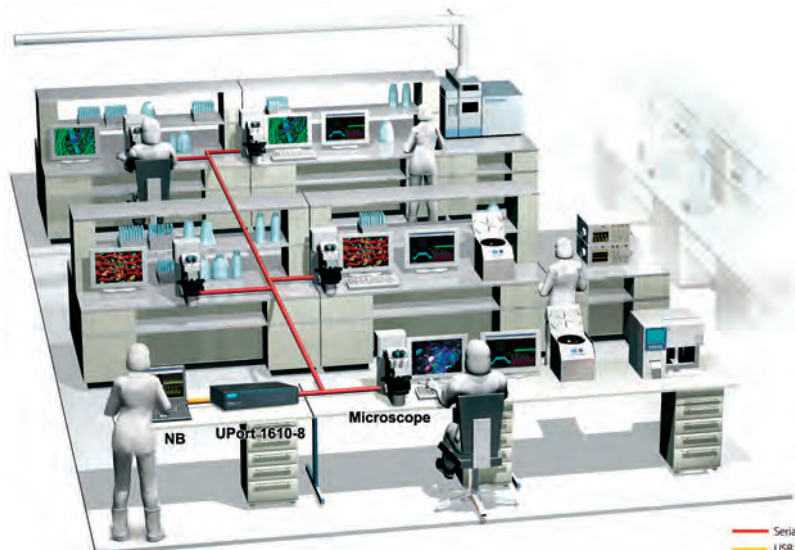

Specifications

USB Interface

Compliance: USB 1.1/2.0 compliant

Connector: USB Type B

Speed: 480 Mbps (Hi-Speed USB) and 12 Mbps (Full-Speed USB)

Serial Interface

Number of Ports: 8

Serial Standards:

UPort 1610-8: RS-232

UPort 1650-8: RS-232/422/485

Connector: DB9 male

Performance

Baudrate: 50 bps to 921.6 kbps (including 500 kbps)

Serial Communication Parameters

Data Bits: 5, 6, 7, 8

Stop Bits: 1, 1.5, 2

Parity: None, Even, Odd, Space, Mark

Flow Control: RTS/CTS, XON/XOFF

FIFO: 128 bytes

Serial Signals

RS-232: Tx/D, Rx/D, RTS, CTS, DTR, DSR, DCD, GND

RS-422: Tx/D+(B), Tx/D-(A), Rx/D+(B), Rx/D-(A), GND

RS-485-4w: Tx/D+(B), Tx/D-(A), Rx/D+(B), Rx/D-(A), GND

RS-485-2w: Data+(B), Data-(A), GND

RS-485 Data Direction: ADDC® (Automatic Data Direction Control)

Operating Systems

Windows Real COM Drivers: Windows 2000, Windows XP/2003/Vista/2008/7/8/8.1/10 (x86/x64), Windows 2012 (x64), Windows Embedded CE 5.0/6.0

Linux Real TTY Drivers: Linux 2.4.x, 2.6.x, 3.x

Android Driver: Android 3.1x and later

Note: Please refer to Moxa's website for the latest driver support information.

Physical Characteristics

Housing: SECC sheet metal (1 mm)

Weight:

Product only: 835 g (1.84 lb)

Packaged: 1435 g (3.16 lb)

Dimensions: 204 x 44 x 125 mm (8.03 x 1.73 x 4.92 in)

Environmental Limits

Operating Temperature: 0 to 55°C (32 to 131°F)

Storage Temperature: -20 to 75°C (-4 to 167°F)

Ambient Relative Humidity: 5 to 95% (non-condensing)

Standards and Certifications

Safety: UL 60950-1

EMC: EN 55022/24

EMI: CISPR 22, FCC Part 15B Class A

EMS:

IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV

IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m

IEC 61000-4-4 EFT: Power: 1 kV

IEC 61000-4-5 Surge: Power: 1 kV

IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m

IEC 61000-4-8 PFMF

Green Product: RoHS, CRoHS, WEEE

Power Requirements

Input Voltage: 12 to 48 VDC

Input Current: 580 mA @ 12 VDC

MTBF (mean time between failures)

Time:

UPort 1610-8: 208,413 hrs

UPort 1650-8: 186,567 hrs

MIL-HDBK-217F


Warranty

Warranty Period: 5 years

Details: See www.moxa.com/warranty

Dimensions

Unit: mm (inch)

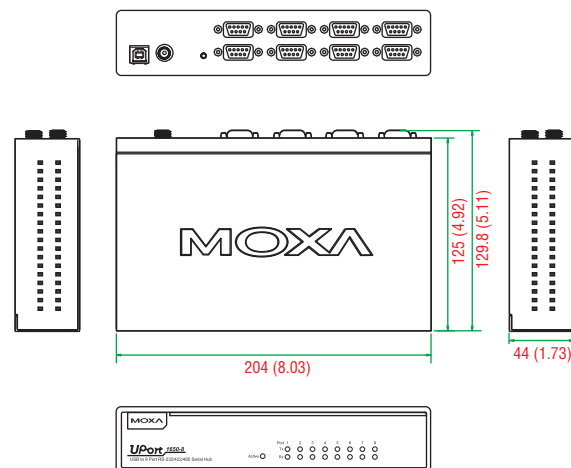

Ordering Information

Available Models

UPort 1610-8: 8-port RS-232 USB-to-serial converter, adapter included

UPort 1650-8: 8-port RS-232/422/485 USB-to-serial converter, adapter included

Optional Accessories (can be purchased separately)

Mini DB9F-to-TB: DB9 female to terminal block connector

CBL-USBA/B-100: USB Type A to USB Type B cable, 100 cm

CBL-F9M9-150: DB9 female to DB9 male serial cable, 150 cm

CBL-F9M9-20: DB9 female to DB9 males serial cable, 20 cm

CBL-RJ45SF9-150: RJ45 to DB9 female shielded serial cable, 150 cm

ADP-RJ458P-DB9: DB9 female to RJ45 connector

A-ADP-RJ458P-DB9F-ABC01: DB9 female to RJ45 connector

DK-UP1400: DIN-rail/wall- mounting kit that includes 2 wall-mounting plates with 6 screws (WK-35-01), and 2 DIN-rail plates with 4 screws (DK35A)

DIN-Rail Kit: DIN-rail kit with 2 screws (P/N: 1490000150011)

Note: One power cord suitable for your region is included in the product package. Additional power adapters and power cords can be purchased separately. Please refer to the Power Accessory Selection Guide for details.

Package Checklist

- 1 UPort 1600-8 USB-to-serial converter
- 1 serial adapter: Mini DB9F-to-TB (UPort 1650-8 only)
- USB cable: CBL-USBA/B-100
- 100 to 240 VAC power adapter suitable for your region
- 1 power cord (suitable for your region)
- Documentation and software CD
- Quick installation guide (printed)
- Warranty card