


PPC-IN101-RK

10.1" Industrial Panel PC



Features

- 10.1" TFT LED with PCAP Touch
- ARM RK3288 Cortex-A17 1.8 GHz
- Multi ports for option: VGA/HDMI/LAN/USB/COM
- DC12V Input, (+9V~36V) wide voltage input optional
- -10°C ~ 60°C extended operating temperature
- IP65 Compliant Front Panel

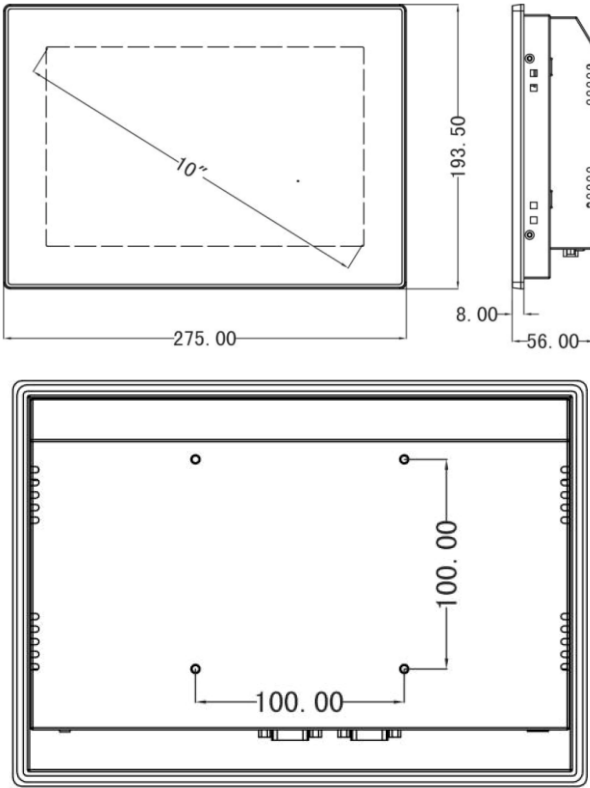

Specifications

CPU	ARM RK3288 Cortex-A17 1.8 GHz
Memory	2G DDR3
Storage	EMMC 8G
GPU	ARM Mali-T764
LAN	RTL 8211E 1000 LAN
Audio	RTL ALC662
Operation System	Android 5.1 / 7.1 / 9.0 / Ubuntu 12.04
I/O	1x HDMI 4x USB 2.0 1x LAN 2 x RS-232 4G,WIFI & Bluetooth (Optional) 1x Audio
Panel Size	10.1" Multi-Touch Capacitive (1280 x 800) LED
Aspect Ratio	16:10
Display Brightness	400 cd/m2
Contrast Ratio	900:1
Backlight Lifetime	30000 Hr (min.)
Viewing Angle	85 / 85 / 85 / 85 (CR≥10) (L / R / U / D)
Transmittance	>90%
Response Time	<5ms
Surface Hardness	≥7H
Supply Voltage	5.0V DC
Touch Life	≥ 3000W
Material	High-strength Al-alloy Support IP65
VESA Mounting	100 x 100 mm
Product Dimensions	275 x 194 x 56 mm
Cut-out Size	263 x 182 mm
Packing Size	360 x 180 x 320 mm
Gross Weight	4 kg
Operating Temperature	-10~60°C
Storage Temperature	-20~80°C(-22~176°F)
Relative Humidity	5%~95%@40°C, non-condensing
Vibration Range	5-500 Hz, 0.026 G2/Hz, 2.16 Grms, X, Y, Z, 1hour per axis
External Power Supply	AC 100 - 240V~50/60Hz,1.5A
Working Voltage	DC 12V / optional(+9V~36V)
Power Consumption	≤20W

*All product specifications and product images are subject to change without notice.