



LCD-IN156-IP65

15.6" Industrial LCD Monitor



Features

- 15.6" TFT LED with PCAP Touch
- Embedded / VESA mounting
- HDMI/VGA/DVI multiple signals input supported
- DC12V~24V Input (Wide Voltage)
- -20°C ~ 70°C extended operating temperature
- IP65 Compliant Front Panel

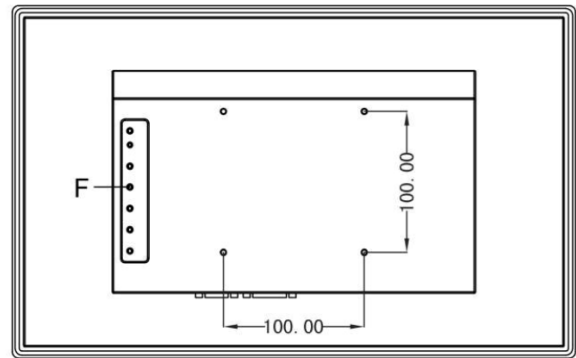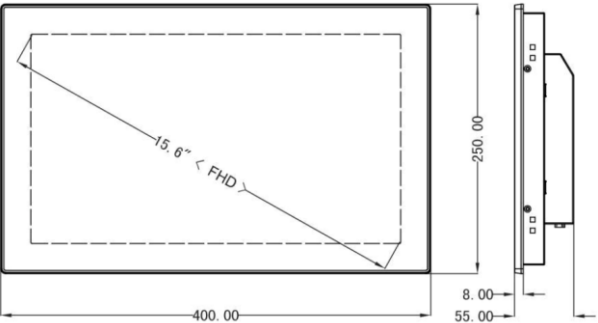

Specifications

Panel Size	15.6" Multi-Touch Capacitive Touch LED
Resolution	1920 x 1080
Aspect Ratio	16:9
Display Brightness	600 cd/m2
Contrast Ratio	1000:1
Colors	16.7M , 74% NTSC
Backlight Lifetime	50000 Hr (min.)
Viewing Angle	89 / 89 / 89 / 89 (CR≥10) (L / R / U / D)
Transmittance	>90%
Response Time	<5ms
Surface Hardness	≥6H
Supply Voltage	5.0V DC
Touch Life	≥ 3000W
I/O	1x HDMI 1x VGA 1x DVI 1x Touch USB 1x OSD Control Key
Material	High-strength Al-alloy
Color	Grey
VESA Mounting	100 x 100mm
Waterproof Rate	IP65
Product Dimensions	400 x 250 x 55 mm
Cut-out Size	386 x 236 mm
Packing Size	460 x 180 x 400 mm
Gross Weight	7.0 Kg
Operating Temperature	-20~70°C
Storage Temperature	-30~80°C(-22~176°F)
Relative Humidity	5%~95%@40°C, non-condensing
Vibration Range	5-500 Hz, 0.026 G2/Hz, 2.16 Grms, X Y Z 1 Hour per axis
External Power Supply	AC 100 - 240V~50/60Hz,1.5A
Working Voltage	DC12V~24V Input (Wide Voltage)

*All product specifications and product images are subject to change without notice.