


ZO-TGLUTB-6C2L



Functional features:

- Support Intel®Tiger Lake-UP3 Processor (1135G7/1145G7)
- 2xSO-DIMM, DDR4 3200MHz, Max32GB
- Support LVDS1/EDP1+EDP2+HDMI+VGA
- Onboard 2*Realtek RTL8111H/8111G
- Support 2*USB3.2 Gen2 (10Gbps), 2*USB3.2 Gen1 (5Gbps), support 6*USB2.0
- 1*M.2 M Key, PCIeX2/SATA/1*SATAIII(6.0 Gb/s)
- 1*M.2 E Key, support Wifi6/bluetooth module;
1*M.2 B Key, support 4G/5G wifi module; 1*SIM card
- DC 12V power supply

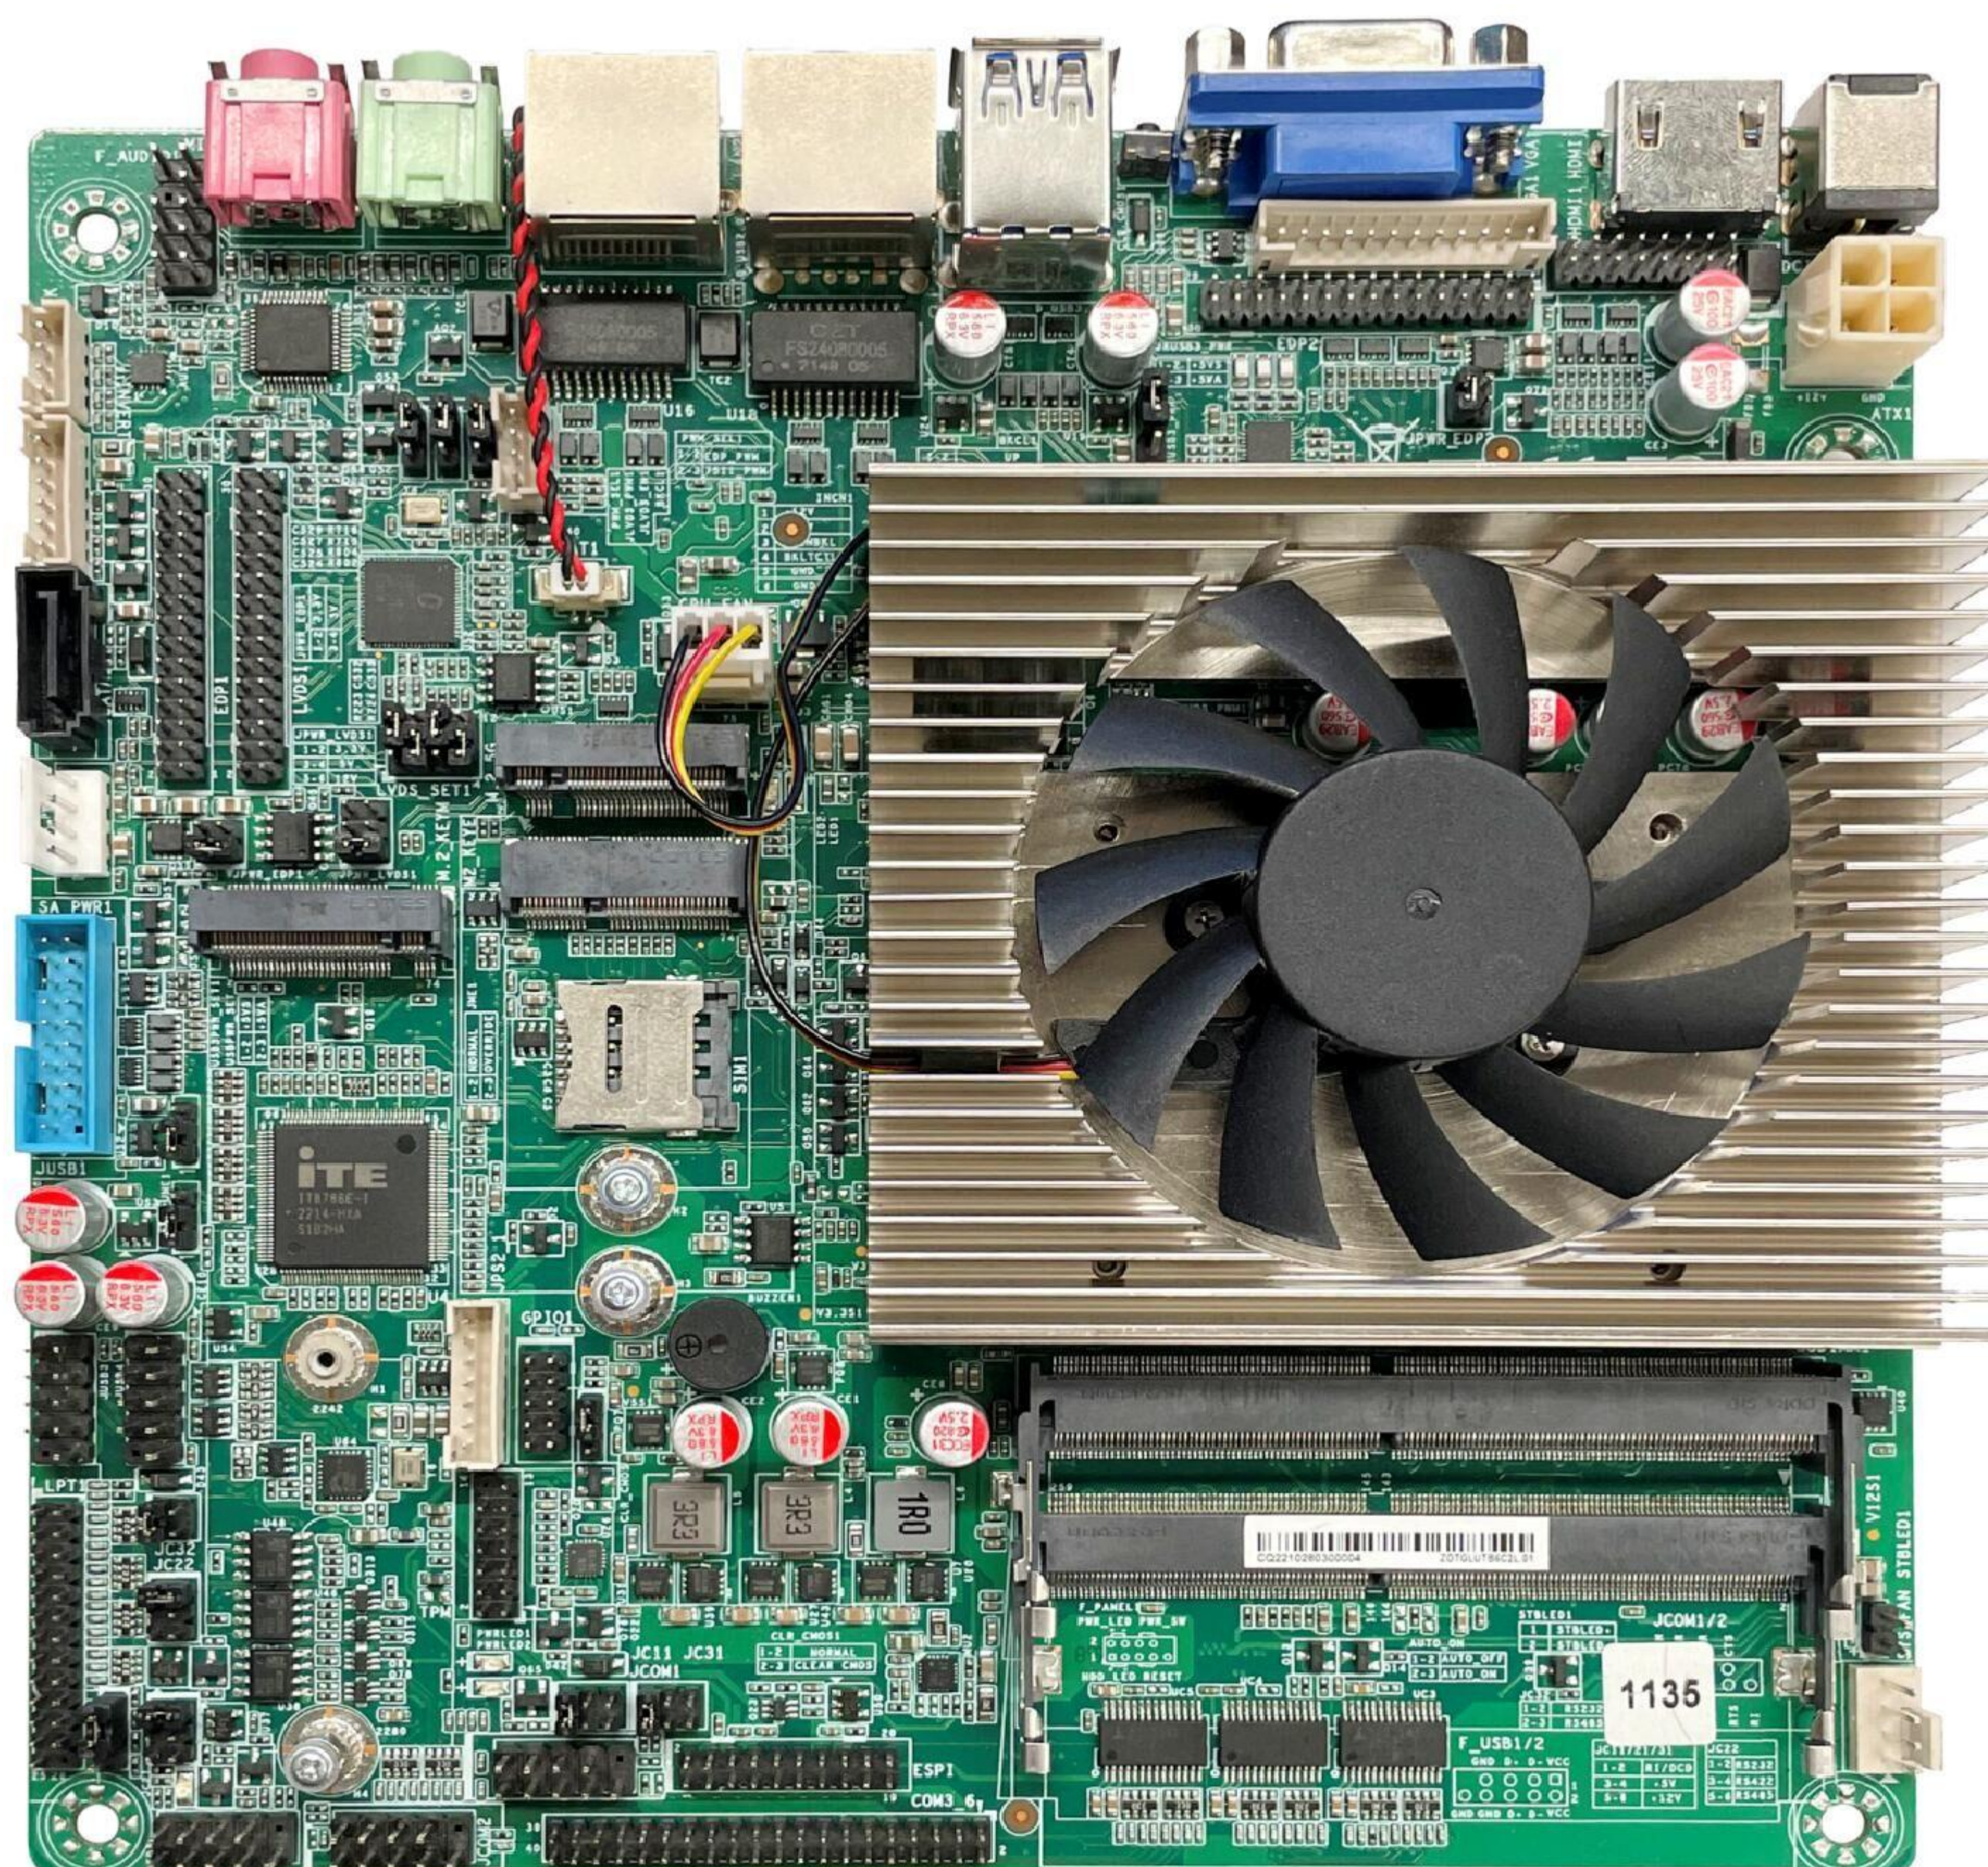

Specification


CPU	Intel®Tiger Lake-UP3 Processor 1135G7/1145G7
Chipset	Intel® SOC
GPU	Intel UHD Graphics 600
Display	LVDS1/EDP1+EDP2+HDMI+VGA
Muilt display	Four Display (synchrony/asynchrony)
USB	2*USB3.2 Gen2 (10Gbps), 2*USB3.2 Gen1 (5Gbps), 6*USB2.0
Memory	2*SO-DIMM DDR4 3200MHz Max32GB
Audio	Onboard ALC897 audio decoder controller; Built-in Amplifier NS4251 3W@4Ω MAX
Network	Onboard 2*Realtek RTL8111H/8111Ggigabit network card
Storage	1*M.2 M Key, support PCIeX2/SATA 1*SATAIII(6.0 Gb/s)
Slot	1*M.2 E Key, support Wifi6/bluetooth module; 1*M.2 B Key, support 4G/5G wifi module; 1*SIM
I/O chip	IT8786E-I
BIOS	AMI BIOS
Power	DC/4PIN ATX 12V power supply
Colling	Fan
Environment	Operating: 0~60°C; Storage: -20~75°C 0%~95% Relative Humidity, Non-condensing
Size	170X170mm

Specification

Rear I/O	1*DC_IN 1*HDMI 1*VGA 1*CLR_CMOS 2*USB3.2 Gen2(10Gbps) 1*LAN2 (2*USB2.0) 1*LAN1 1*F_OUT 1*F_MIC
Internal I/O	1*F_AUDIO pin 1*Speaker pin 1*INVERT pin 2*EDP pin 1*LVDS pin 1*BKCL pin 1*SATA pin 1*SATA_PWR pin 1*F_USB1 (extended 2*USB3.2 Gen1) 3*F_USB2.0 (extended 6*USB2.0) 1*LPT pin 1*JPS2 pin 1*GPIO pin 1*TPM pin 1*F_PANEL pin 6*COM pin 1*CFAN pin 1*SFAN pin 1*JHDMI pin 1*JVGA pin 1*ATX_IN

ZO-TGLUTB-6C2L

Pictures:

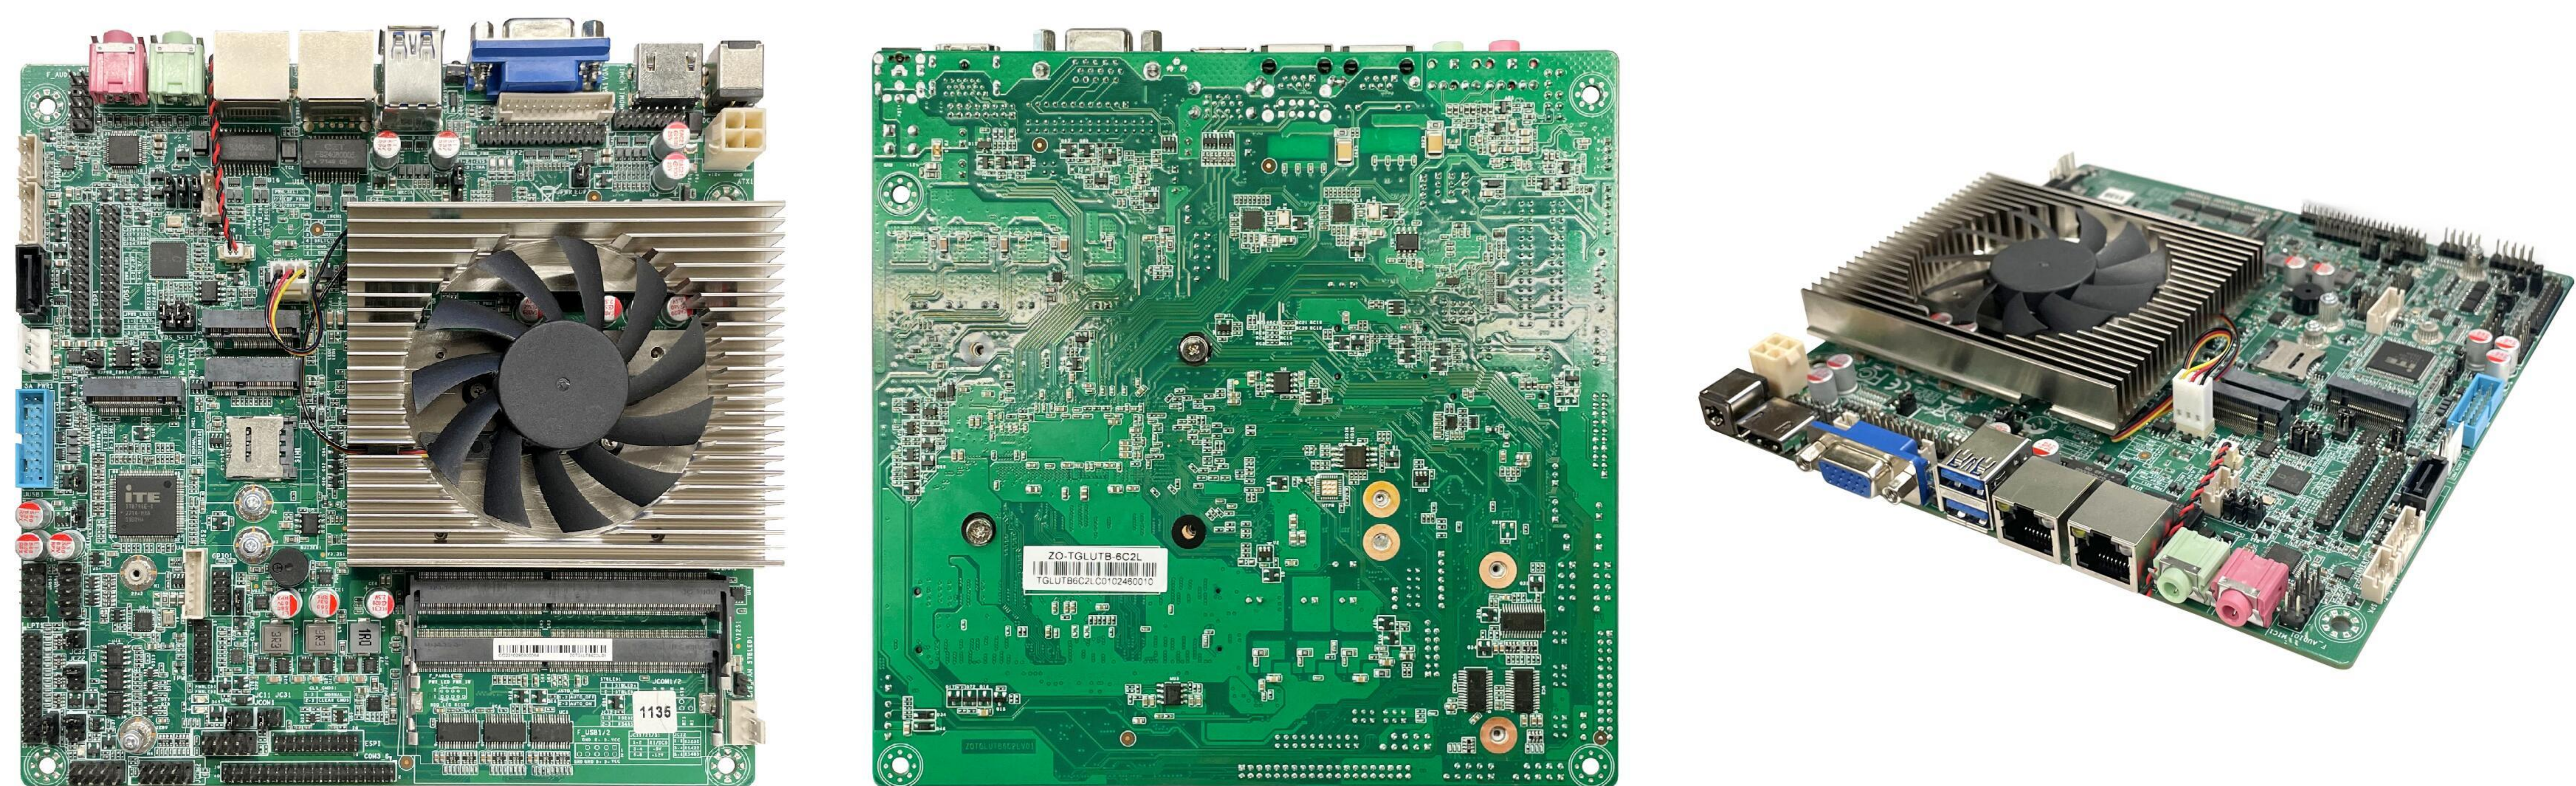

Interfaces:

