


ZO-ADLNT-6C2L



Function Characteristics:

- Support Intel®Alder Lake-N (N305/N300/N100) Processor
- Support SO-DIMM, DDR4 3200MHz , Max16GB
- Support LVDS/EDP1+EDP2+HDMI+VGA
- Onboard 1*Realtek RTL8111H/8111G
- Support 1*USB3.2 Gen2 (10Gbps), 8*USB2.0
- 1*M.2 M Key, support PCIEX2/SATA3.0 ; 1*SATA3.0
- 1*M.2 E Key, support WiFi/BT (Discrete / CNVi)module;
1*M.2 B Key, support 4G/5G module
- DC 12V power supply

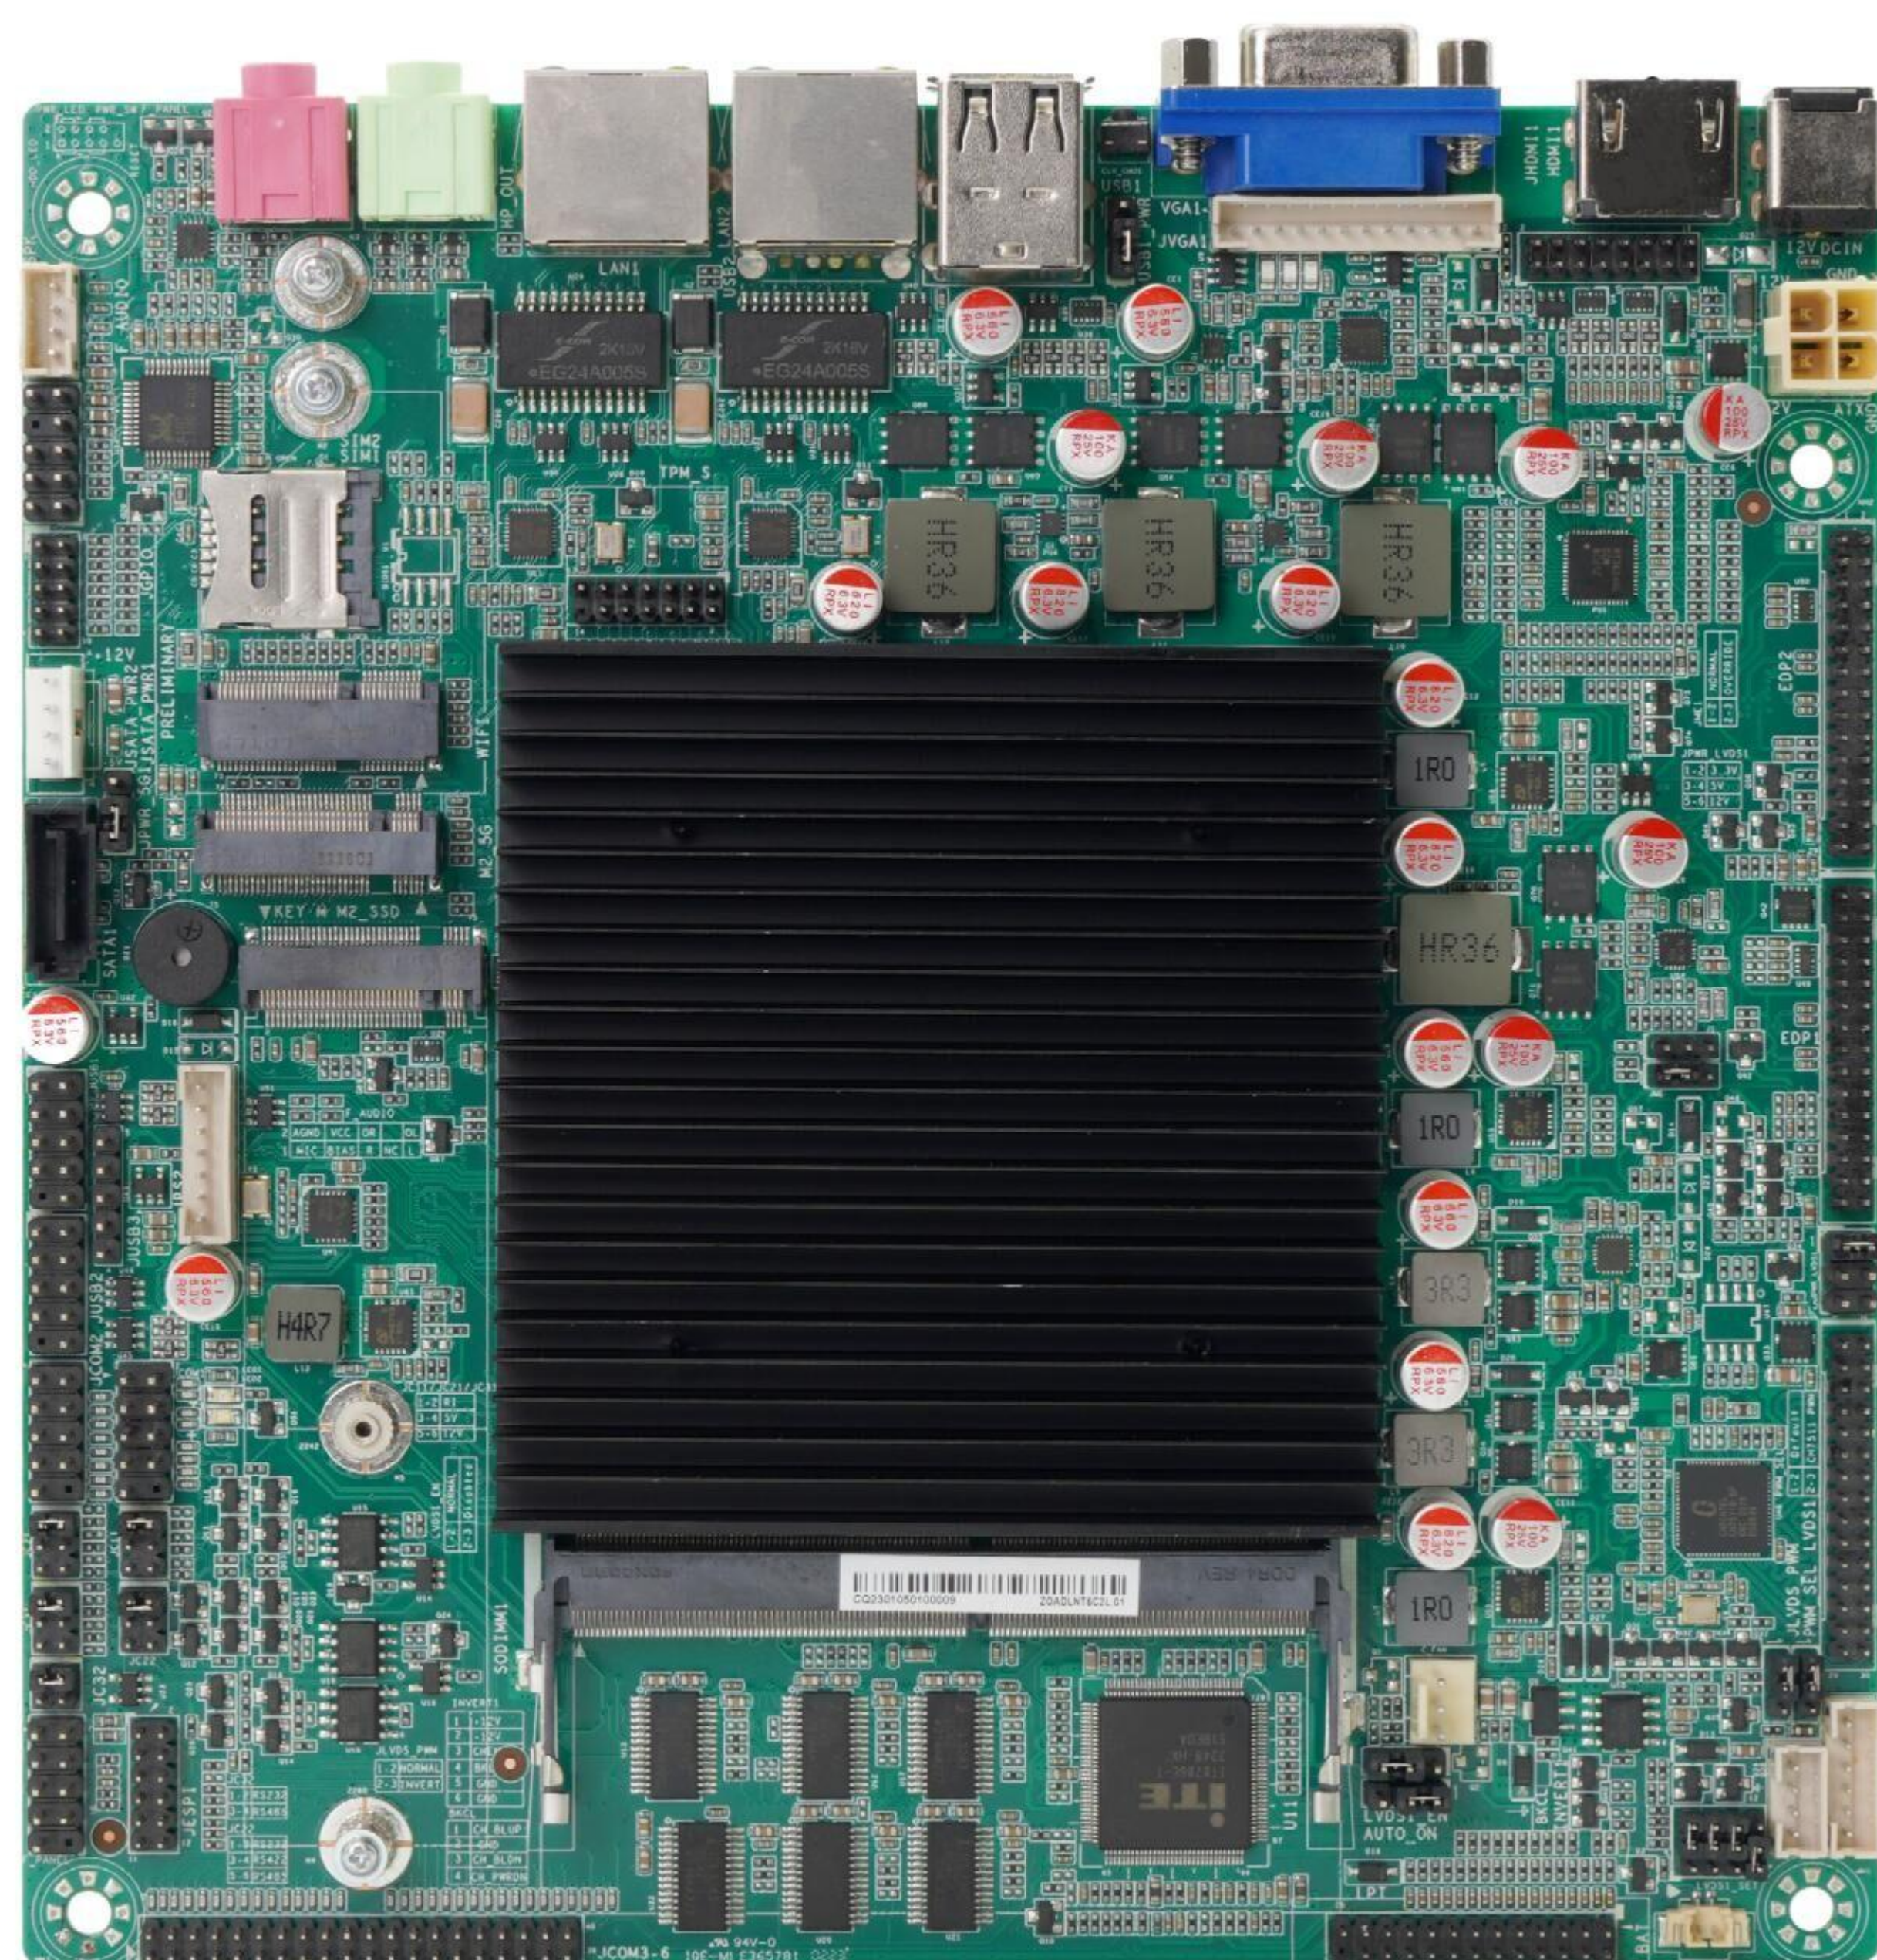

Specification


CPU	Intel®Alder Lake-N Processor (N305/N300)
Chipset	Intel® SOC
GPU	Intel® HD Graphics
Display	LVDS/EDP1+EDP2+HDMI+VGA
Muilt	Triple synchrony/asynchrony
USB	1*USB3.2 Gen2 (10Gbps), 8*USB2.0
Ram	1*SO-DIMM DDR4 3200MHz Max16GB
Audio	onboard ALC897 audio decoder controller NS4251 3W@4Ω MAX
Network	Onboard 1*Realtek RTL8111H/8111G Gigabit LAN card
Storage	1*M.2 M Key, support PCIEX2/SATA3.0 self- adaptation; 1*SATA3.0 (6.0Gb/s) Port
Slot	1*M.2 E Key, Support Wifi+Bluetooth; 1*M.2 B Key, Support 3G/4G/5G module
I/Ochip	IT8613E-I
BIOS	AMI BIOS
Power	DC 12V plwer supply
Cooling	Comes with CPU FAN
Operating Environment	Operation: 0~60°C; storage: -20°C~75°C 0% ~ 95% Relative Humidity,Non- condensing
Size	170X170mm

Specification

Real I/O	1*DC_IN
	1*HDMI
	1*VGA
	1*CLR_CMOS
	1*USB3.2 Gen2(10Gbps)+USB2.0
	1*LAN2
	1*LAN1
	1*F_MIC
	1*F_OUT
Internal I/O	1*Speaker pin
	1*F_AUDIO pin
	1*GPIO pin
	1*SATA_PWR pin
	1*SATA pin
	3*F_USB2.0 (extended to5*USB2.0)
	1*PS2 pin
	6*COM pin
	1*F_PANEL pin
	1*ESPI pin
	1*LPT pin
	1*CPU_FAN pin
	1*BKCL
	1*INVERT pin
	1*LVDS pin
	2*EDP
	1*HDMI pin
	1*VGA pin
	1*TPM pin
	1*ATX_IN pin

ZO-ADLNT-6C2L

Pictures:

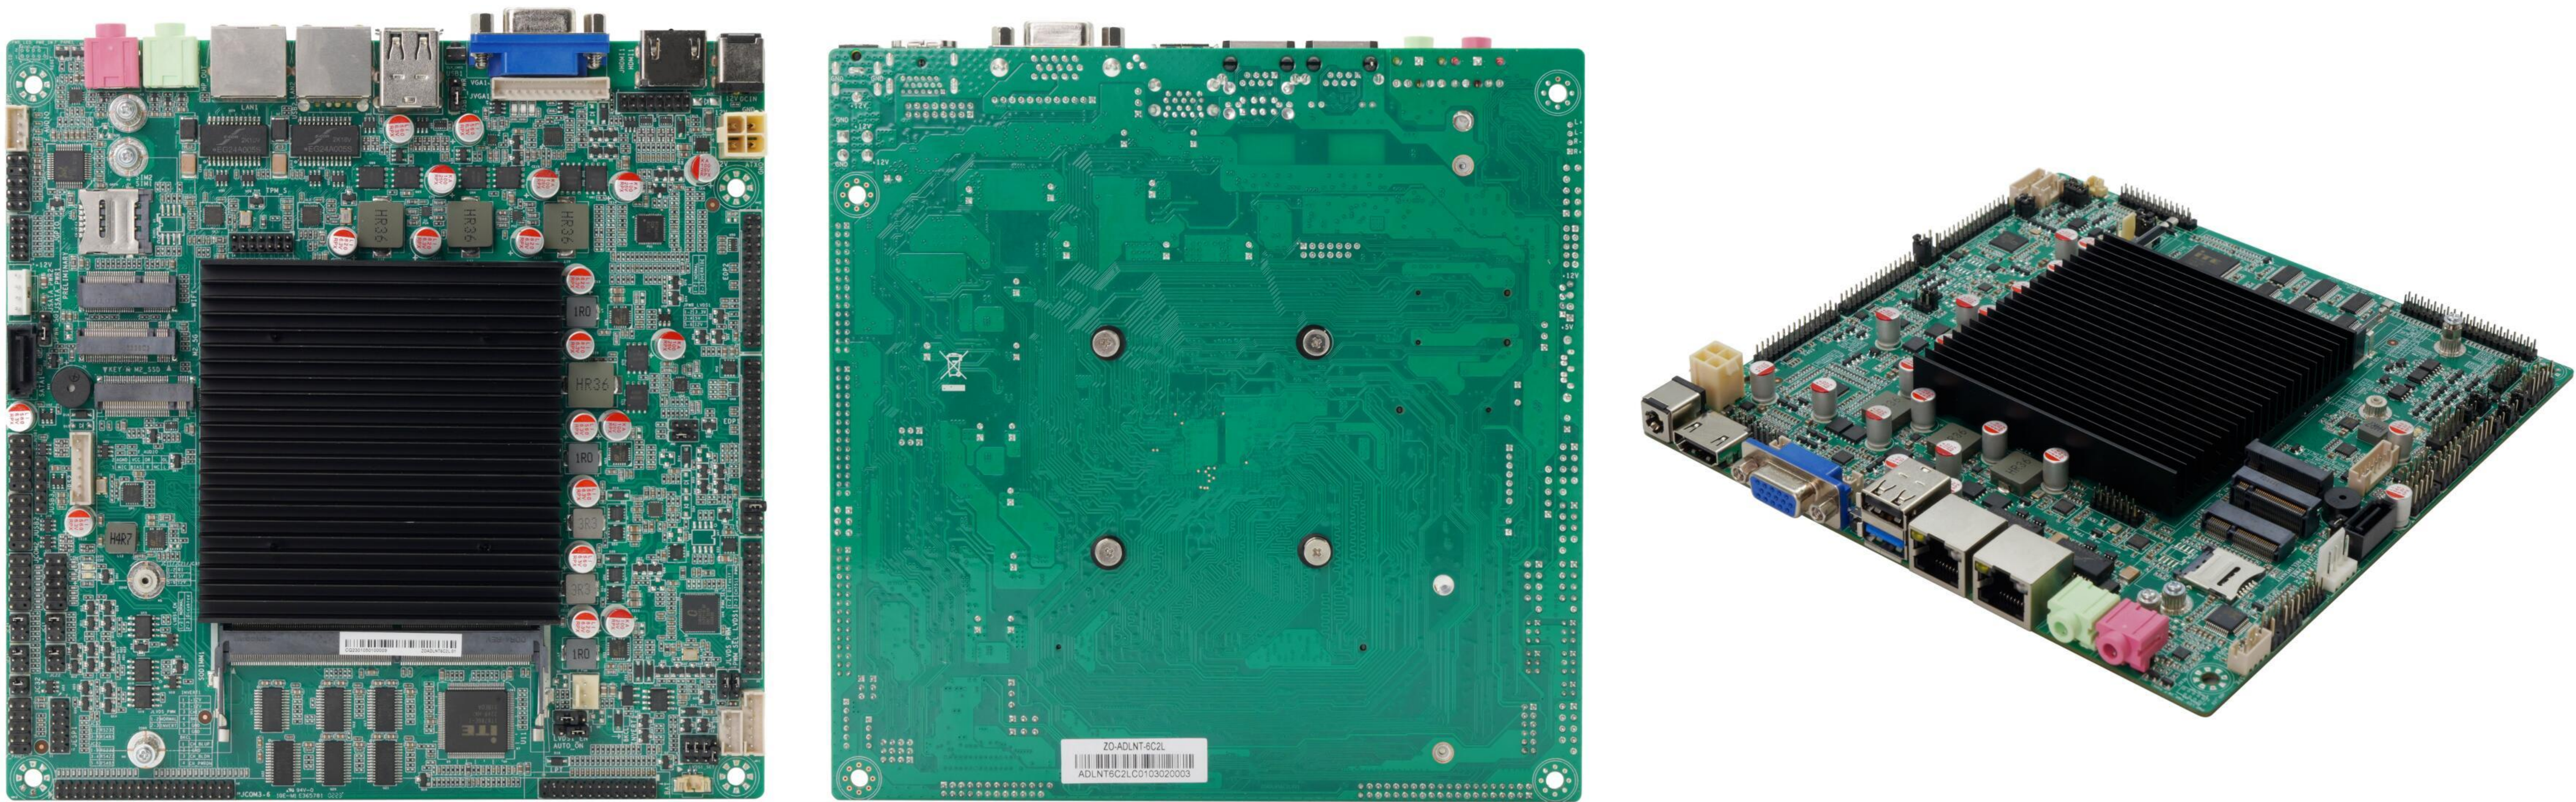

Interfaces:

