


BAT-I2

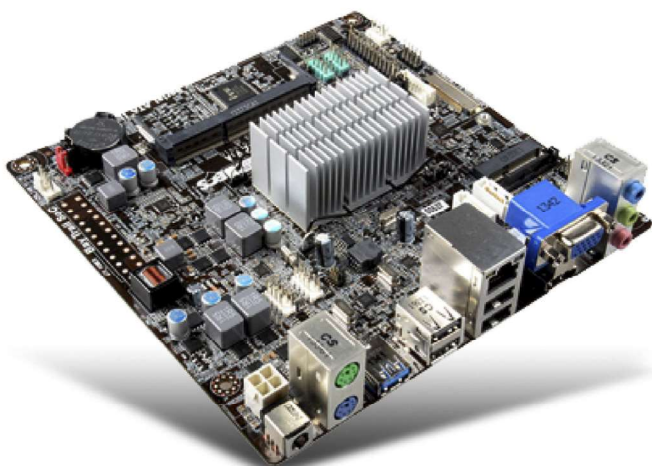

- Applied Solid Capacitor for CPU VRM to ensure a longer lifespan for system
- ECS Durathon Technology ensure the stability, reliability and performance of system.
- Dual Display design for multiple output support
- Integrated Printer (LPT) port / header to expand functionality
- Microsoft Windows 8 Certified
- Intel® VRD 12 Ready
- Supports DirectX® 11 to enhance graphical performance
- Supports HDMI 1.4a Technology (resolution up to 1920X1200) and HDCP function
- Free Bundle: CyberLink Media Suite

CPU	◦ Onboard Intel® Bay Trail processors ◦ On-Board CPU Selections - Intel® Bay Trail J1800 processor. - Intel® Bay Trail J1900 processor. - Intel® Bay Trail J2900 processor. ◦ VRD 12.0 ◦ Solid Capacitor for CPU side ◦ Supports Intel® Hyper-Threading Technology
GRAPHICS	◦ Supports DirectX® 11 ◦ Supports Full HD 1080P Blu-ray / HD-DVD Playback
MEMORY	◦ Single-channel DDR3 Memory architecture ◦ 1 X DDR3 SO-DIMM socket ◦ Support up to 8 GB*
EXPANSION SLOT	◦ 1 X Mini PCI Express X1 slot(s) for Wi-Fi /Bluetooth modules
Storage	◦ 2 X Serial ATAII 3Gb/s
Audio	◦ 6-Channel HD audio CODEC ◦ VIA VT1705 6-channel High Definition audio CODEC ◦ BluRay DVD/HD DVD support
LAN	◦ Realtek RTL8111G Gigabit Fast Ethernet Controller ◦ (Realtek RTL8106E 10/100Mbps Fast Ethernet Controller optional)
USB	◦ 1 X USB3.0 port(s) up to 5Gb/s • 8 X USB2.0 port(s) Up to 480 Mb/s - Back Panel 4 port(s) - Onboard 4 port(s)
REAR PANEL I/O	◦ 1 X PS/2 Keyboard & PS/2 mouse connectors ◦ 1 X Audio port (Line Out/Line In/Mic In) ◦ 1 X RJ-45 port ◦ 1 X HDMI port(s) ◦ 1 X D-Sub (VGA) port(s) ◦ 1 X USB3.0 port(s) ◦ 4 X USB2.0 port(s) ◦ 1 X DC-in Connetor
CONNECTORS & HEADERS	◦ 1 X 4-pin CPU_FAN connector with smart fan

HEADERS	◦ 1 X 4-pin SYS_FAN connector with smart fan ◦ 1 X Front Panel MIC/Speaker out header ◦ 1 X Front Panel switch/LED header ◦ 2 X USB 2.0 header • Support additional 4 USB ports ◦ 2 X SATA II 3Gb/s connector(s) ◦ 1 X CLR_CMOS header ◦ 2 X Serial port header (COM) ◦ 1 X Parallel port header (LPT) ◦ 1 X LVDS connector (optional)
SYSTEM BIOS	◦ AMI BIOS with 8 MB SPI Flash ROM ◦ Supports ACPI 5.0 & DMI ◦ Dual Display ◦ Plug and Play, STR (S3) / STD (S4) , Hardware monitor, Multi Boot ◦ Multi-Language BIOS ◦ Audio, LAN, can be disabled in BIOS ◦ Dual-Monitor function
FORM FACTOR	◦ Mini ITX Form Factor ◦ 170 mm x 170 mm
OS Support	◦ Windows 7 64-bit ◦ Windows 8.1 32-bit ◦ Windows 8.1 64-bit ◦ Windows 10 64-bit ◦ Windows 10 32-bit
Certifications	◦ CE/FCC Certification ◦ ErP/EuP Certification ◦ WHQL Certification ◦ WHCK Certification
Bundled Software	◦ Free Bundle: CyberLink Media Suite