



PPC-IN32-I3-16G-256G-247
23.8" Industrial Panel PC

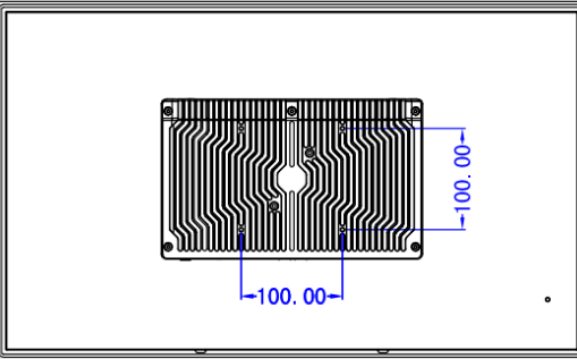

Features

- Aluminium Alloy Front Panel (IP66 Waterproof)
- 23.8" TFT LCD (1920x1080) Capacitive Touch
- 8th Gen Intel Core i3-8145U 2.1GHz
- 2xLAN, 2xCOM
- Static Electricity & S Surge Protection
- Built-in TPM2.0
- DC 9~36V

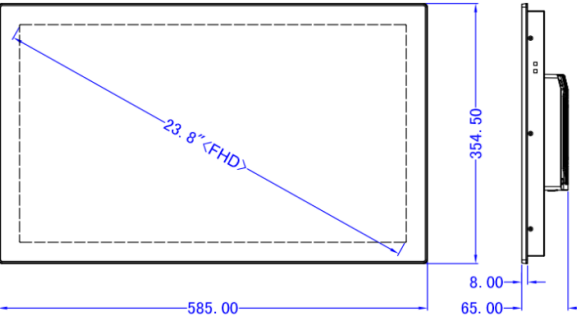

Specifications

CPU	Intel® Core i3-8145U 2.1GHz, TDP 25W
L2 Cache	4MB
System Chipset	Integrated with Intel® SoC
Memory	DDR4L 2400MHz 16GB, Up to 64GB
Hard Disk	1 x M.2 256G SSD
Graphics	Intel HD Graphics 620
Network	Intel® I211-AT GbE LAN
Audio	Realtek ACL662 Audio Controller
TPM	TPM 2.0
Operation System	Windows 10 11, Linux, Ubuntu
I/O	1x HDMI 1x USB 2.0 3x USB 3.0 2x LAN 2 x RS-232/422/485 4G, 5G, WIFI & Bluetooth (Optional) 1x Audio_out & Mic_in
Panel Size	23.8" 10-Point Projected Capacitive Screen (1920x1080)
Aspect Ratio	16:9
Display Brightness	350 cd/m2
Contrast Ratio	1000:1
Backlight MTBF	30000 Hr (min)
Viewing Angle	89 / 89 / 89 / 89 (CR≥10) (L / R / U / D)
Surface Hardness	≥7H
Power Adapter	1 x Optional AC/DC 12V/5A , 60W
Power Mode	Support AT, ATX Mode
Power Input	2-pin Terminal Block Connector with Power Input 9~36VDC
Power Protection	OVP (Over Voltage Protection) / OCP (Over Current Protection) / RPP (Reverse Polarity Protection)
Power Consumption	≤45W
Material	Aluminum alloy panel, anodized treatment
Mounting	Stand Wall VESA Panel
Product Dimensions	585 x 354.5 x 65 mm
Cut-out Size	568 x 337 mm
Packing Size	730 x 200 x 530 mm
Gross Weight	6.5 Kg
Operating Temperature	-20~70°C
Storage Temperature	-30~80°C(-22~176°F)
Relative Humidity	5%~95%@40°C, non-condensing
Vibration Range	1.5 Grms, IEC 60068-2-64, random, 5 ~ 500 Hz, 1 hr/axis
IP Level	Front Panel IP66
EMC	CE, FCC, ROHS

*All product specifications and product images are subject to change without notice.