



96KBM-1C



Benefits

- ▶ 1U keyboard drawer
- ▶ 104-key keyboard with either touchpad or trackball
- ▶ Short depth design of 400mm
- ▶ Enhanced aesthetics with molded front panel and two point lock

Product Specifications

Console Port	
KB / MS	USB interface Drawer end : attached 6ft USB cable x 2 Server end : USB type A x 2

Physical		
Dimensions (W x D x H)	Product	442 x 400 x 44 mm 17.4 x 15.7 x 1.73 inch
	Packing	582 x 500 x 100 mm 22.9 x 19.7 x 3.9 inch
Weight	Net	8.6 kg / 18.9 lb
	Gross	10.1 kg / 22.2 lb


* All dimensions stated are subject to change if options are selected / integrated to base model part codes

Mounting Distance	
Keyboard drawer	410 ~ 640 mm 16.1 ~ 25.2 inch

Environment	
Operating temp.	-20 to 65°C degree
Storage temp.	-20 to 60°C degree
Operating humidity	10~90%, non-condensing
Storage humidity	5 ~90%, non-condensing
Operating altitude	16,000 ft
Non-operating altitude	40,000 ft
Shock	10G acceleration (11ms duration)
Vibration	10~300Hz 0.5G RMS random vibration



Compliance	
EMC	FCC & CE
Safety	CE / LVD & UKCA
Environment	REACH & RoHS3 / WEEE

Diagrams (mm)

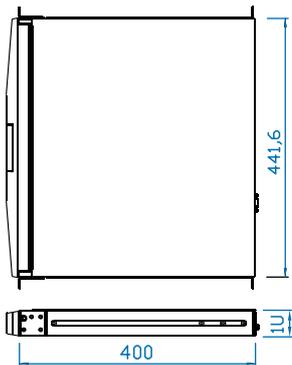

Standard Keyboard

Ge G keyboard with touchpad

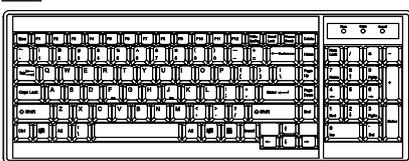

Supporting layouts

America	U.S.
EMEA	U.K. Germany France Russia Spain Italy
Asia	Japan Korea