



EGPC-B2S1

M.2 to Dual Isolated CAN Bus 2.0B / J1939 / CANopen

HIGHLIGHT FEATURES

- Baud rate up to 10 / 20 / 50 / 100 / 250 / 500 / 800 / 1000K
- SAE J1939 / CANopen high layer protocol (Optional)
- Meets the Requirements of the ISO 11898-1
- Compliant with IEC 60950-1 : 2005 + A1 : 2009 + A2 : 2013
2.5kV HiPOT protection
- Compliant with EN61000-4-2 (ESD) Air-15kV, Contact-8kV
- Supports CAN message acceptance filter
- Supports Linux SocketCAN
- Termination resistor enabled / disabled by switch

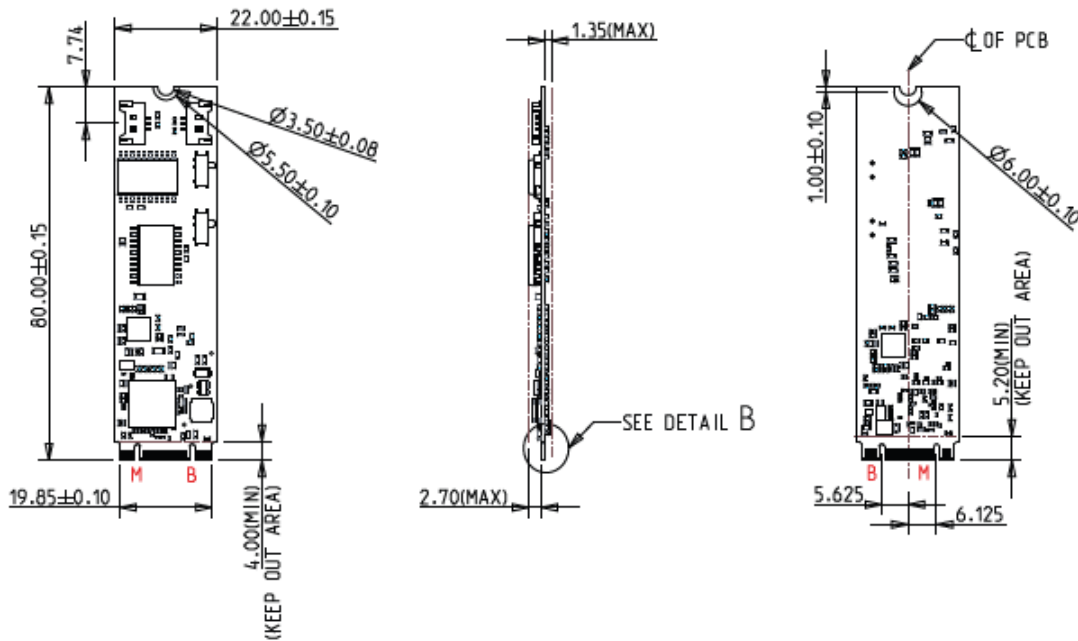
SPECIFICATIONS

Model Name	EGPC-B2S1
Module Type	M.2 to Dual Isolated CAN Bus 2.0B / J1939 / CANopen Module
Form Factor	M.2 2280 B+M Key
Function	CAN Bus
Input I/F	PCI Express 1.1 x1
Output I/F	CAN Bus 2.0B
Output Port	2
Output Connector	DB-9
Max. Power Consumption	2.834W (3.3V, 859mA)
Dimension (W x L x H/mm)	22 x 80 x 4.85
Temperature	Operation : W/T -40°C ~ 85°C (Ta) Storage : -55°C ~ 95°C (Ta)
Vibration	5G@[7 ~ 2000Hz]
Shock	50G@0.5ms
OS Support	Windows : 7 (32 / 64bit), 8 / 8.1 (32 / 64bit), 10 (32 / 64bit), and above version Linux : SocketCAN driver from Kernel 2.6.38 and above (32 / 64bit)
Warranty	3 Years
Notes	--

ORDER INFO.



P/N	Description
EGPC-B2S1-W1	M.2 2280 to Dual Isolated CAN Bus 2.0B Module
EGPC-B2S1-W2	M.2 2280 to Dual Isolated J1939 / CANopen Module

MECHANICAL DRAWING



TOLERANCE: ± 0.3 mm
UNIT: mm

PIN DEFINE

CAN DB9 Connector Pin Define		3Pin CAN Connector Pin Define	
1	NC	1	CAN-L
2	CAN-L	2	CAN-H
3	GND	3	GND
4	NC	<div style="background-color: black; color: white; padding: 5px; text-align: center;"> Side Switch (Termination Resistor) </div>	
5	NC		
6	NC	1	Enable 
7	CAN-H	2	Disable 
8	NC		
9	NC		

HQ (Taiwan) T +886-2-7703-3000 / E sales@innodisk.com

CN T +86-755-2167-3689 / E sales_cn@innodisk.com

US T +1-510-770-9421 / E usasales@innodisk.com

EU T +31-40-3045-400 / E eusales@innodisk.com

JP T +81-3-6667-0161 / E jp_sales@innodisk.com

